


# AUDL 4007

## Auditory Perception

Week 5

Temporal resolution

# Modulating a sinusoid

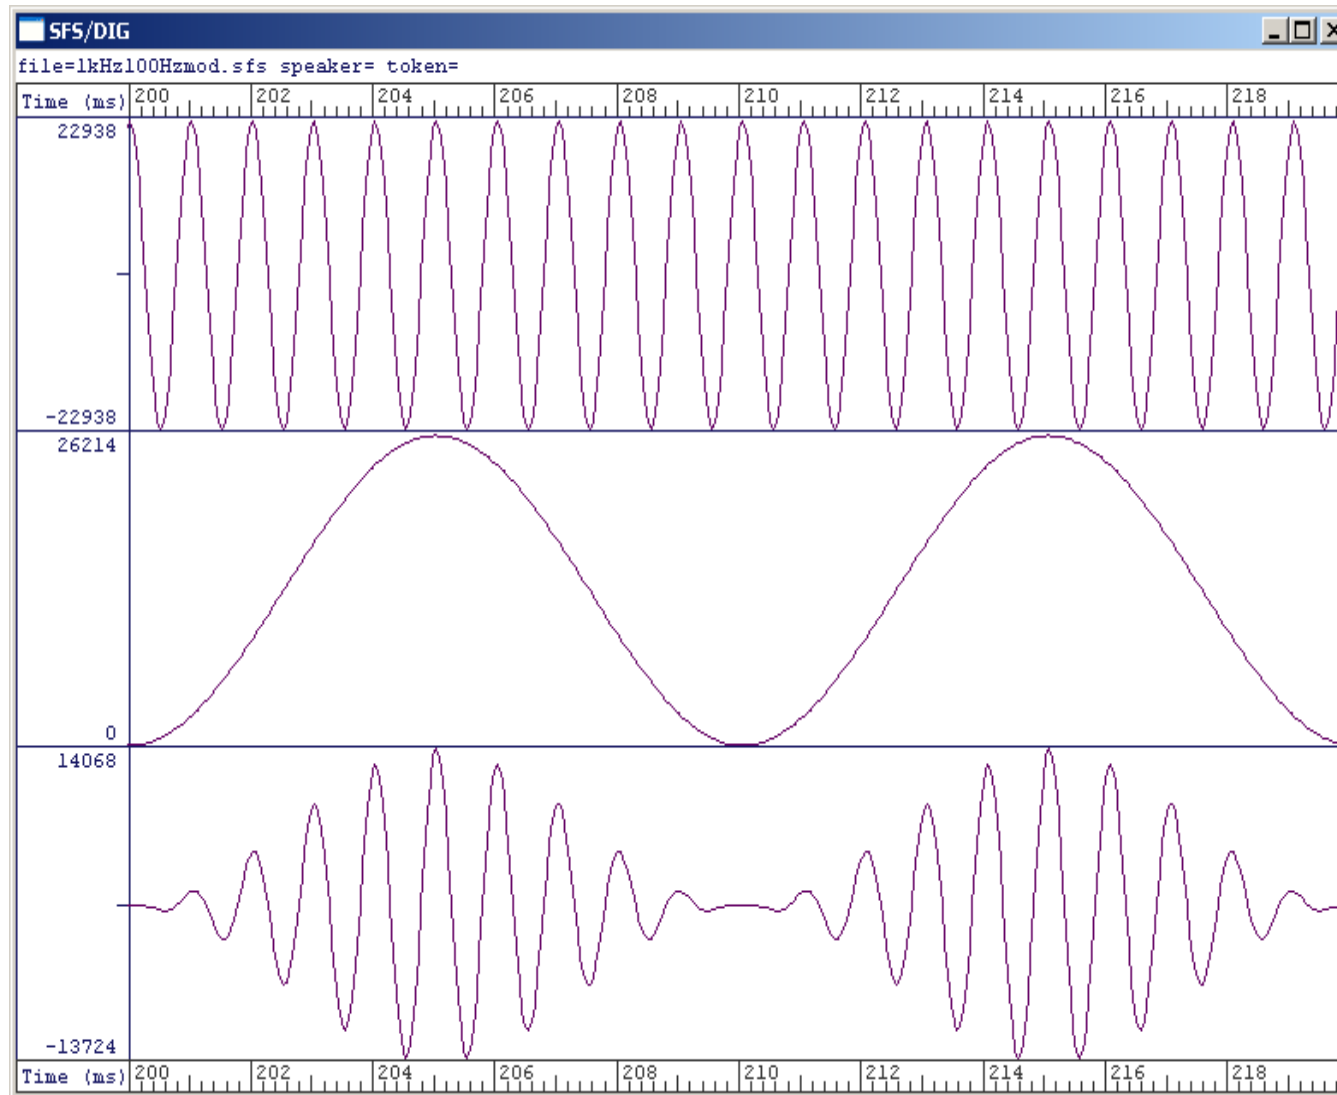

carrier at 1 kHz  
(fine structure)



x

modulator at 100  
Hz  
(envelope)




=


amplitude-  
modulated wave

# Domain of temporal resolution

- Fine structure and envelope
  - fine structure – relatively fast – reflects spectral components of sounds in the sound waveform, and periodicity (in some definitions)
  - envelope is the slower stuff
  - think of all waves as being made by multiplying an envelope against a carrier

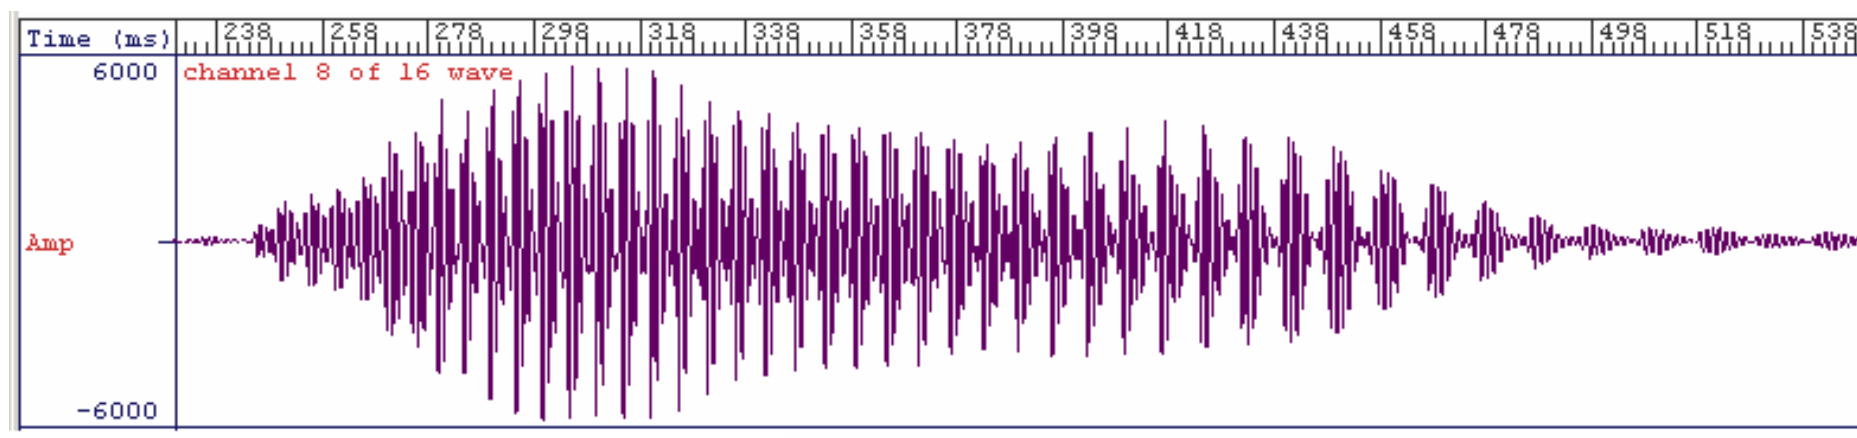

# Fine structure and envelope

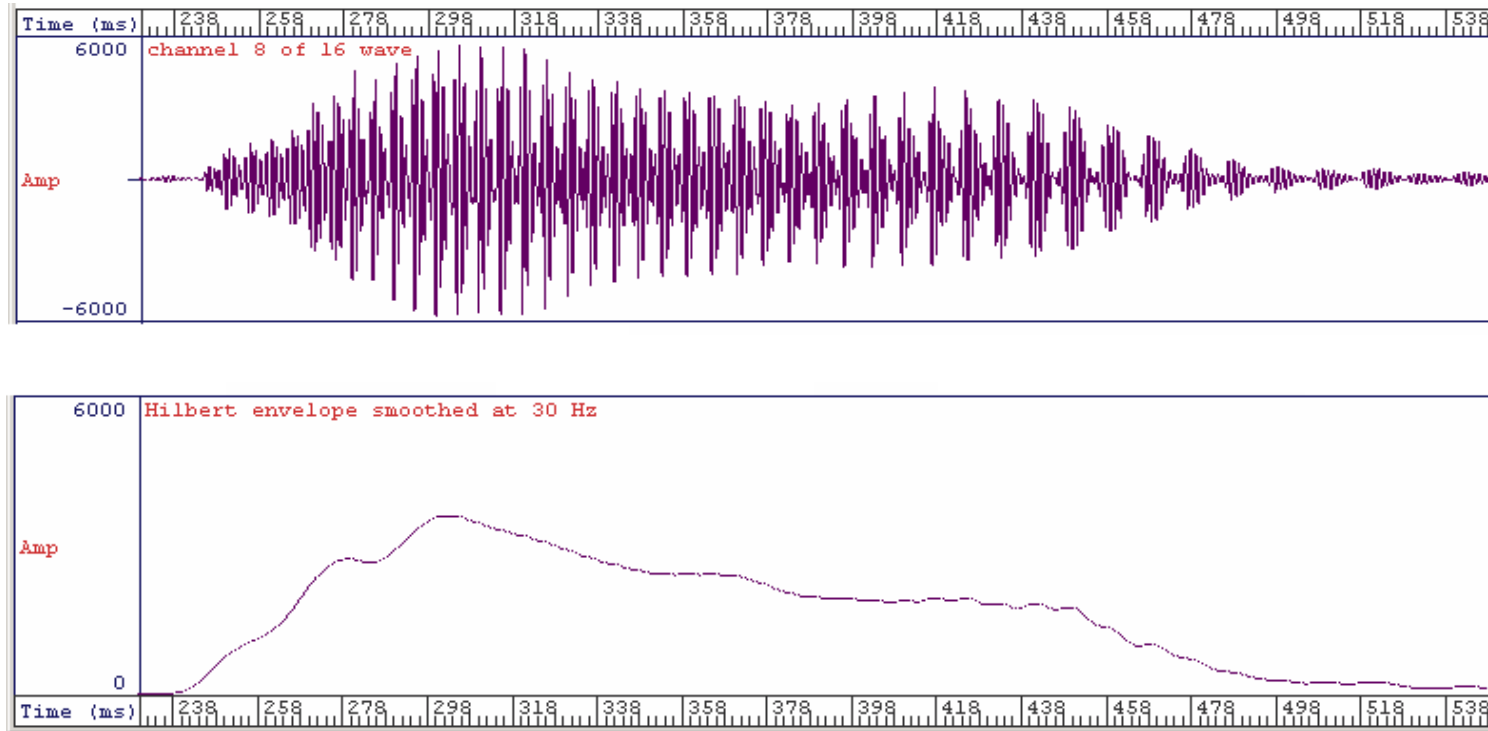

Envelope – reflects changing amplitude of signal e.g., over multiple cycles for periodic sounds

# Caveat about 'temporal resolution'


- Typically defined as reflecting perception of variations over time in ...
  - *envelope* (and there are different ways to define envelope)
  - rather than *fine-structure*
- But at least in theory, could concern temporal variations, for example, in frequency of a sinusoid

# Temporal Resolution for envelope most often tested in two ways


- Both involve *modulation* of the amplitude of waveforms ...
  - Gap detection
  - Amplitude modulation
- But modulation almost always results in spectral changes.
- You usually cannot change the temporal (envelope) properties of a signal without also changing its spectrum
  - leading to uncertainty about what aspect of the sounds a listener is responding to

# The need to eliminate spectral cues


- Amplitude modulating signals usually results in spectral changes (broadening, known as *splatter*)
  - e.g., effect of 10 ms gap in spectrum of 1 kHz sinusoid
- Need to avoid listeners hearing spectral changes

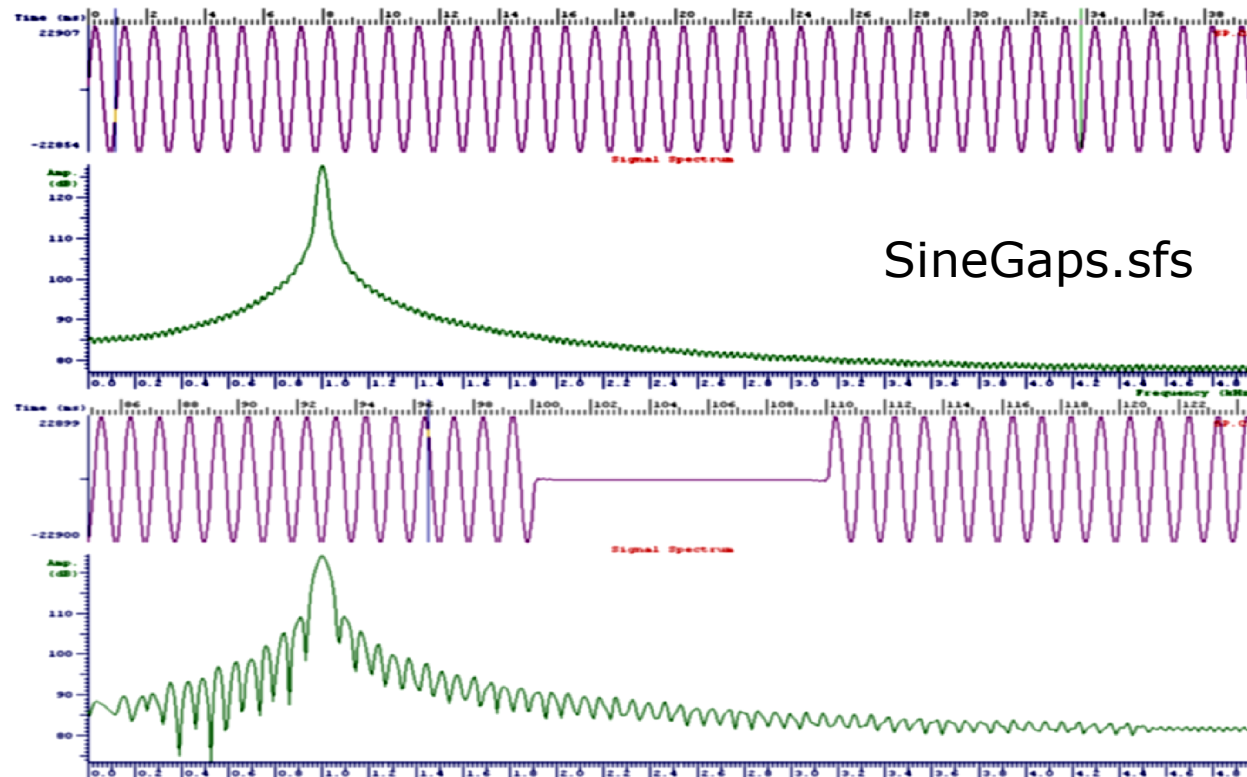

# Effects of amplitude modulation on the spectrum of a sinusoid

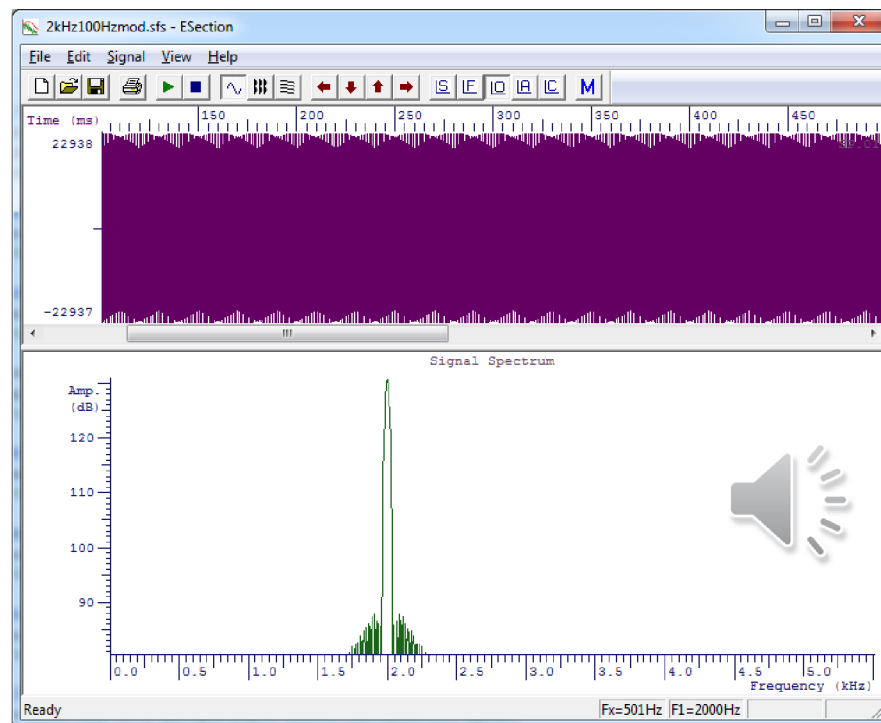


2 kHz sinusoid

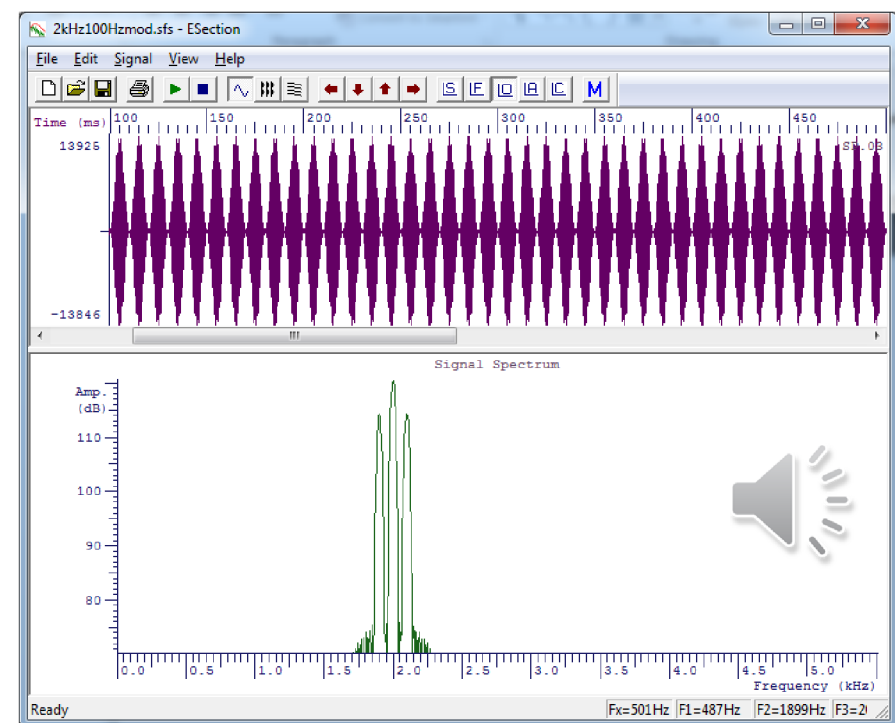


100 Hz AM of 2 kHz sinusoid  
Spectral sidebands at 1900 and  
2100 Hz



# Effects of amplitude modulation on the spectrum of a white noise

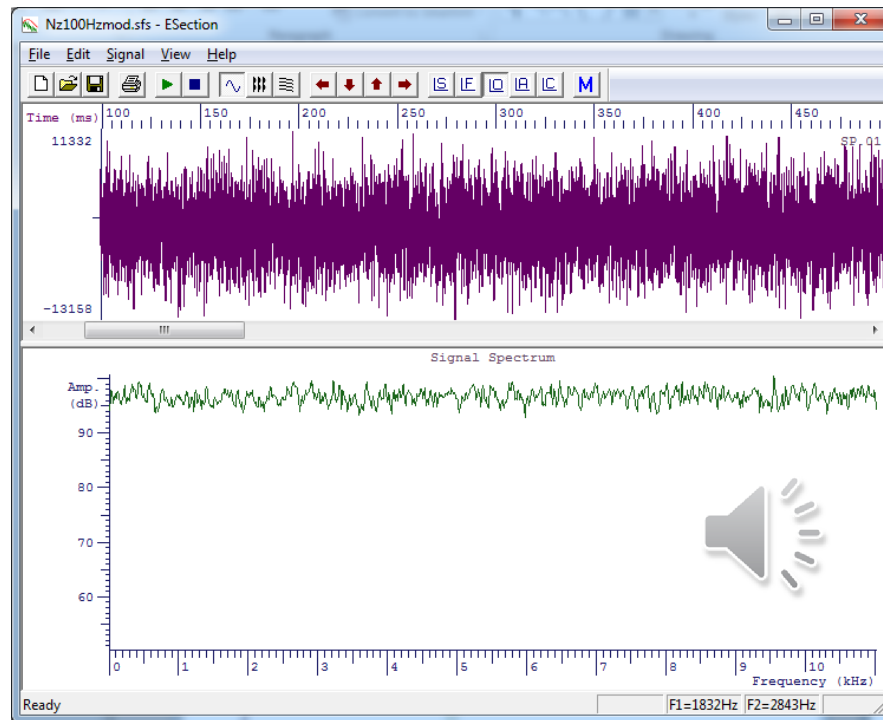


White noise

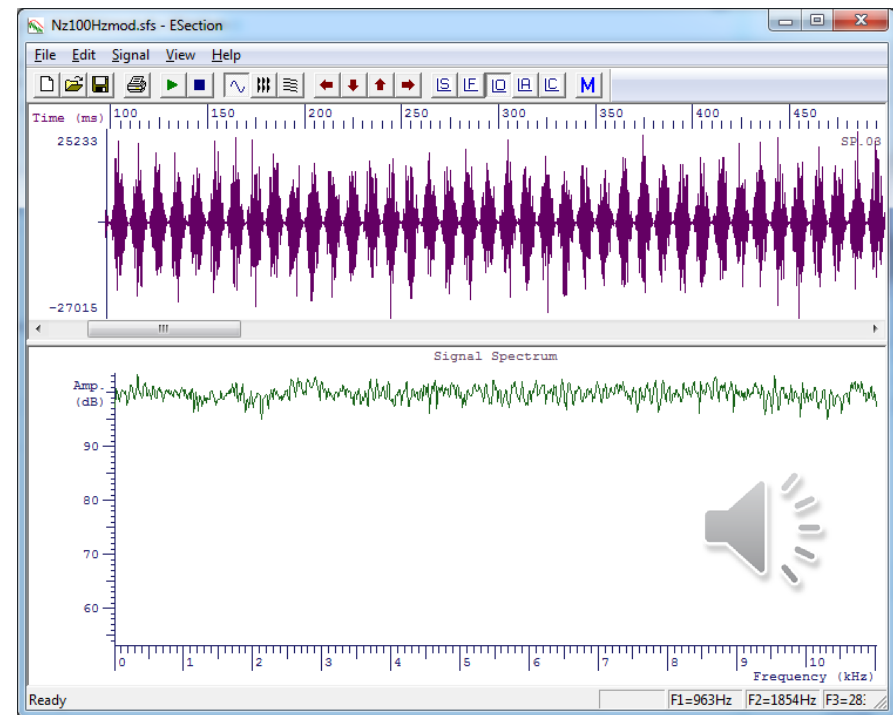


100 Hz AM of white noise

# Effects of AM on the spectrum of a bandpass noise

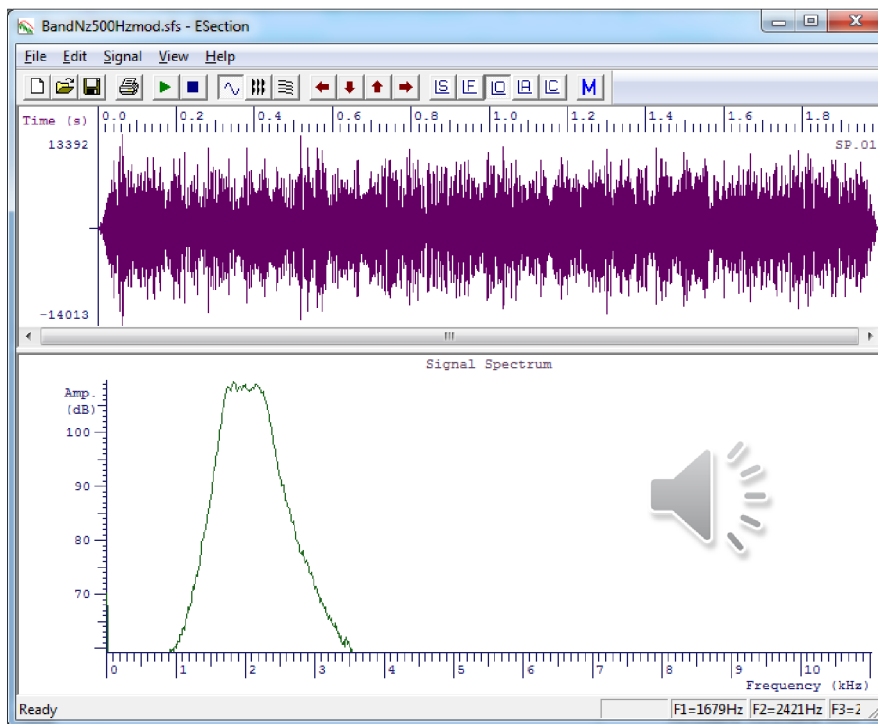

bandpass noise

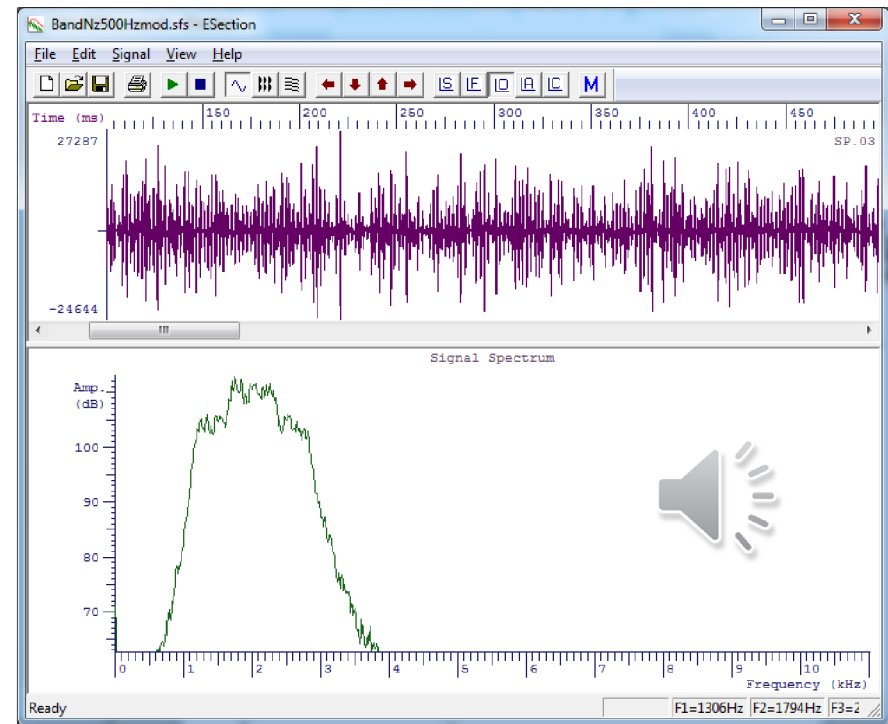


500 Hz AM of bandpass noise

Note the spectral sidebands, and that the perceived difference between the sounds is not temporal

# Three ways to avoid the splatter problem

- Modulate wideband noise stimuli
- Minimise audibility of spectral changes by
  - keeping any sidebands in the same auditory filter as the original signal – allows use of low AM rates with sine carriers
  - and/or adding masking noise to make spectral changes inaudible
- Modulate wideband noise stimuli and filter into bands afterwards
  - but can change extent/form of modulation

# Gap thresholds

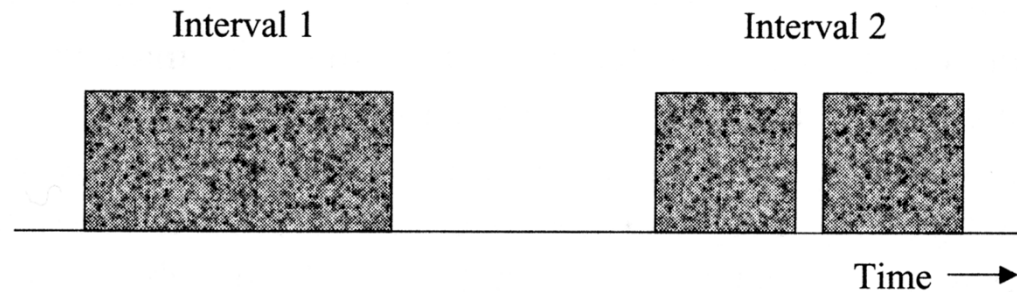

- Pick the sound with the gap – vary the gap duration to find threshold
- Thresholds for wide-band noise are around 3 ms

# Effects of noise spectrum on gap detection

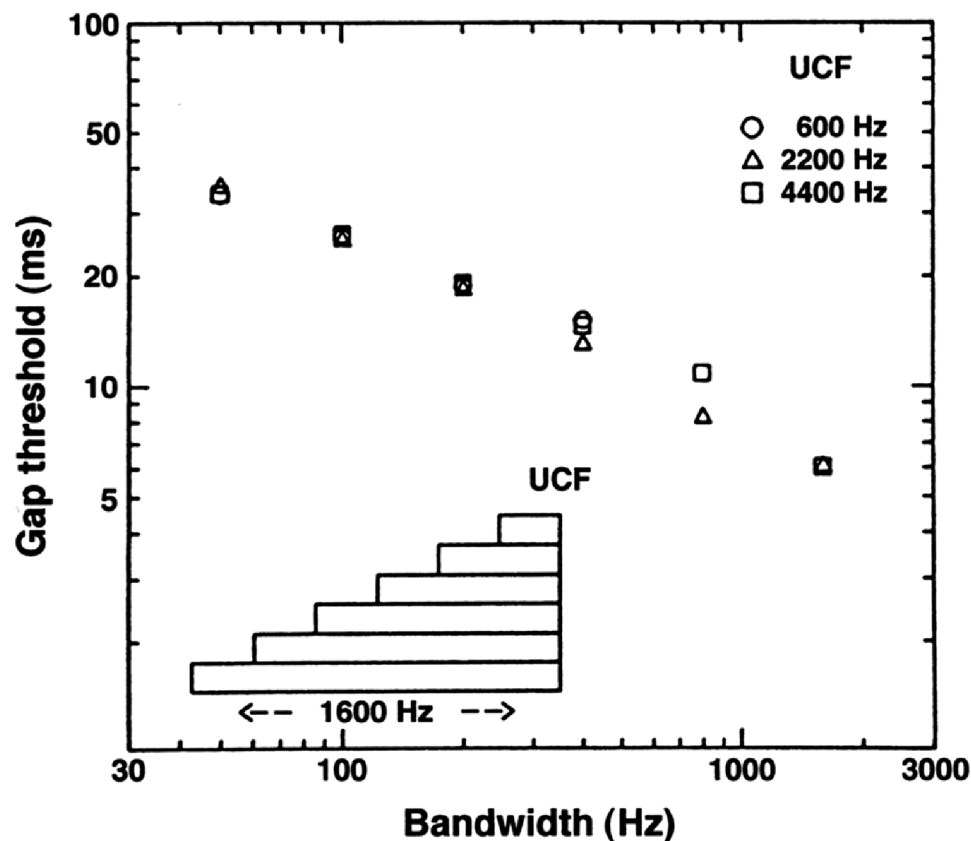


FIGURE 5.4 Gap thresholds for noise bands plotted as a function of the bandwidth of the noise bands. The upper cutoff frequency (UCF) of the noise bands was fixed at one of three values: 600, 2200, and 4400 Hz. The inset bars illustrate schematically how the bandwidth was varied keeping the UCF fixed. Gap thresholds decrease progressively with increasing bandwidth, but are almost independent of UCF. The data are from Eddins *et al.* (1992).

Wider noise bandwidth gives smaller gap thresholds

Frequency location of noise (UCF parameter) has little effect


May be because wide bandwidth allows listeners access to information from large numbers of filter channels

# AM detection - TMTF

- TMTF – temporal modulation transfer function
- Analogous to an ordinary transfer function or frequency response
  - dealing with frequencies of *modulation* rather than frequencies of a sinusoidal waveform directly
- A more detailed approach to temporal resolution
  - Considers temporal modulation across different single frequencies of sinusoidal AM
    - cf gap detection where in effect the modulator is a pulse comprising wide range of modulation frequencies
  - As for gap thresholds, wide-band noise is an ideal signal because of the lack of spectral changes.
  - Fixed modulation rate – vary depth of modulation to determine minimum detectable depth

# 10 Hz modulation rate

$20\log(m)$

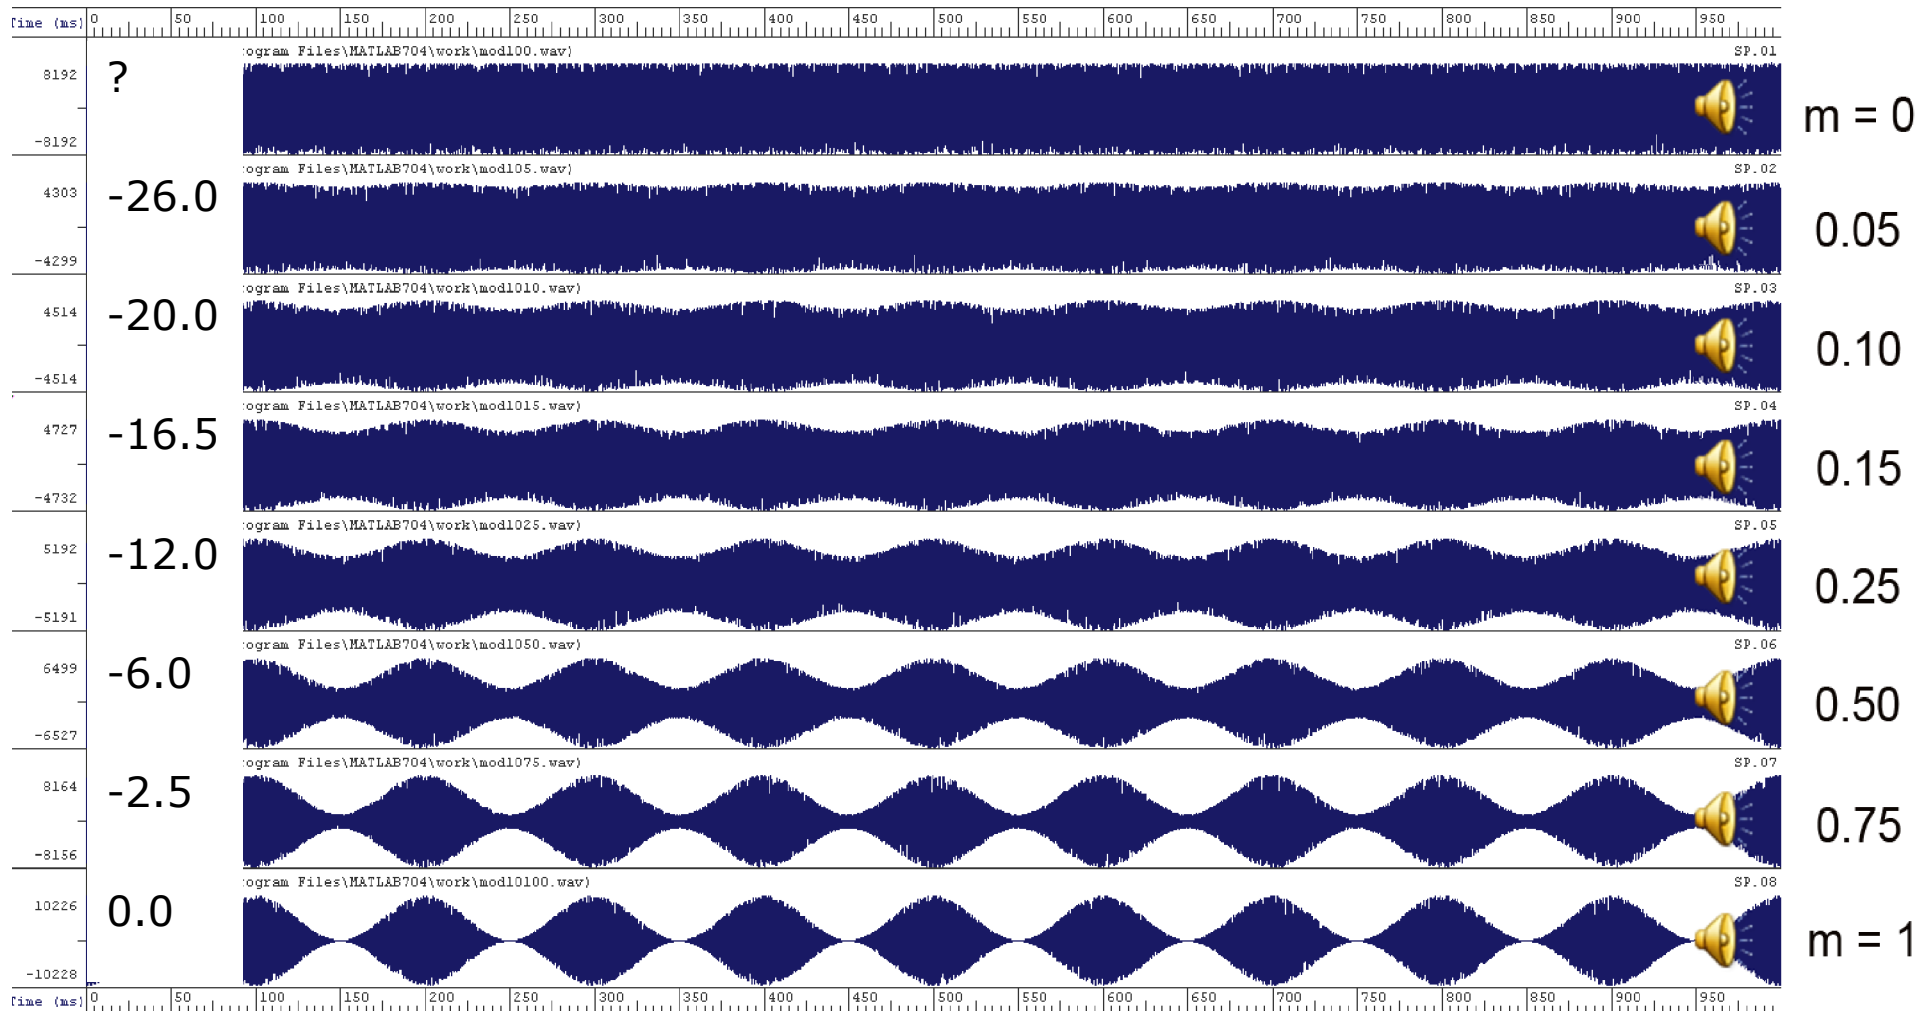



## Amplitude Modulation Detection

Four sets of amplitude modulated noises each of 500-msec duration with modulation rates of 4, 16, 64, and 256 Hz

For each set: ten comparisons of an unmodulated noise followed by the amplitude modulated noise

The depth of modulation starts at 50% or  $20\log(m)$  = -6 dB and decreases in 5% steps ending at 5%.

Count how many of the ten pairs have a noticeable modulation compared to the 1<sup>st</sup> unmodulated noise



**4 Hz**




**16 Hz**




**64 Hz**



**256 Hz**

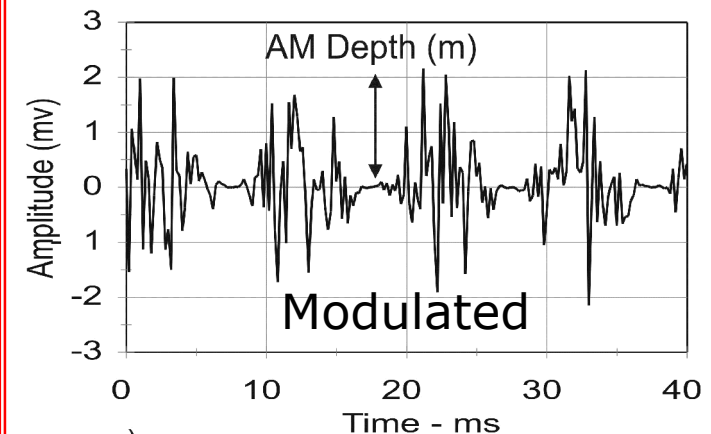

a)

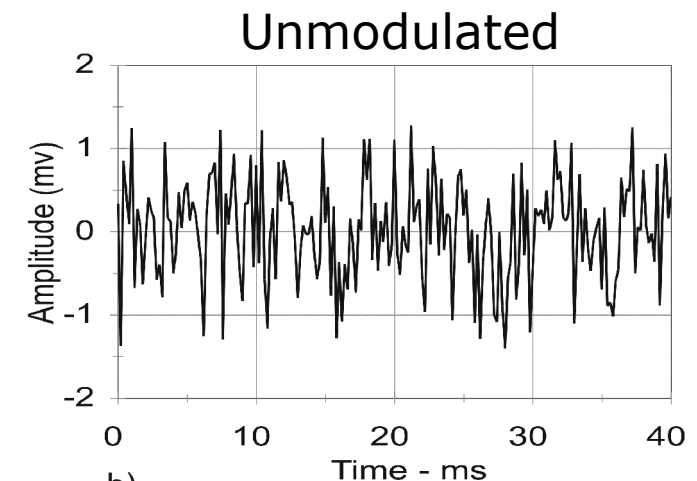


b)



# Results from a TMTF measurement

- Thresholds expressed in dB as  $20 \log(m)$  where  $m$  is modulation index

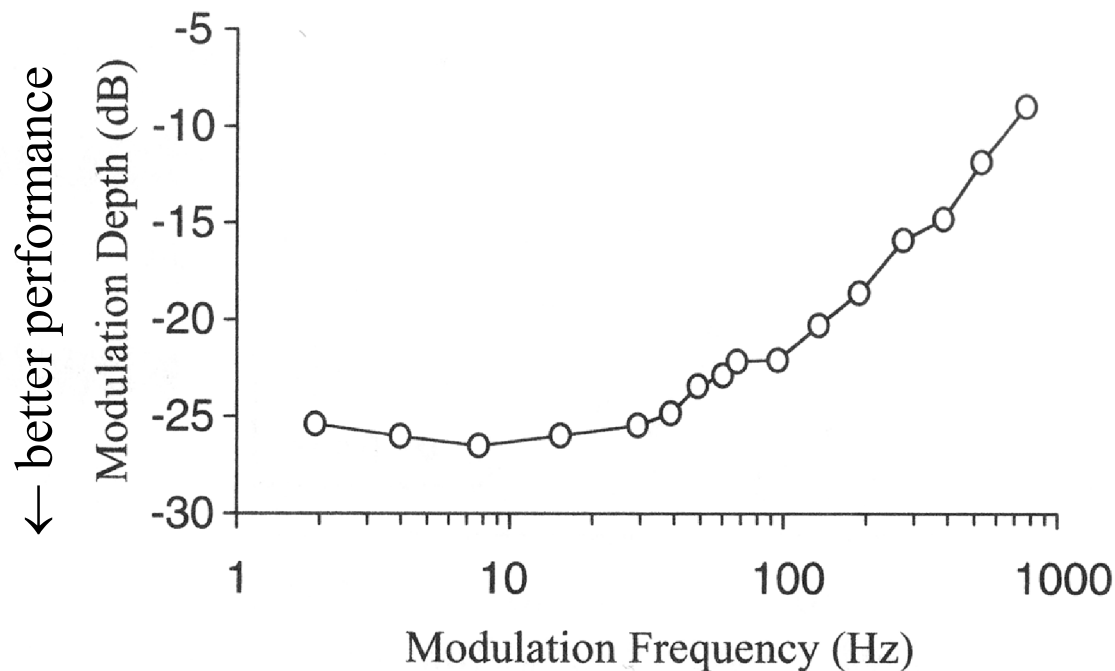


$m = 1$  gives 0 dB  
(modulation depth =  
carrier amplitude)

$m = 0.05$  gives -26 dB

Upper limit of  
amplitude modulation  
detection between 500  
and 1000 Hz

# Results from a TMTF measurement (inverted)

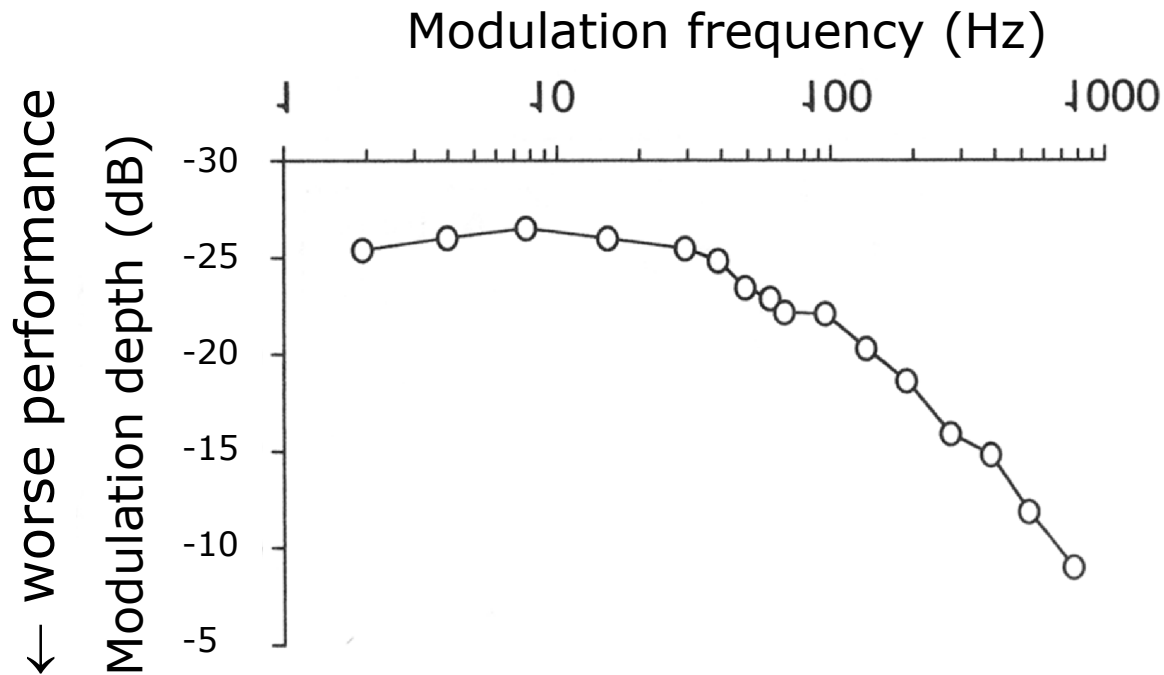

Remember: a transfer function is something like a frequency response. How well do the modulations get through?

What kind of modulation filter is this?


Translating to the clinic:  
Auditory Neuropathy Spectrum  
Disorder (ANSD)

# Temporal resolution in ANSD

- ANSD defined by intact OHCs and normal OAEs but lack of CAP and ABR responses.
- Near normal audiometric thresholds but often severe problems with speech perception
- Problem in hair cell? Synapse? ???
- Likely to involve disruption of phase-locking in auditory nerve

# Rance, McKay and Grayden, 2004 (Ear & Hearing)

- Compared children with normal hearing, SNHL, and ANSD
- Measured
  - Frequency selectivity (simple notched noise method)
  - Sinusoid frequency discrimination
  - TMTFs
  - CNC word phoneme recognition

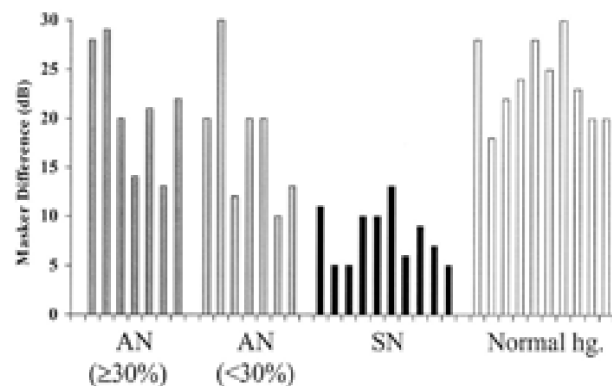

SNR difference for thresholds in wide-band and notched noise: 1 kHz probe, 500 Hz notch


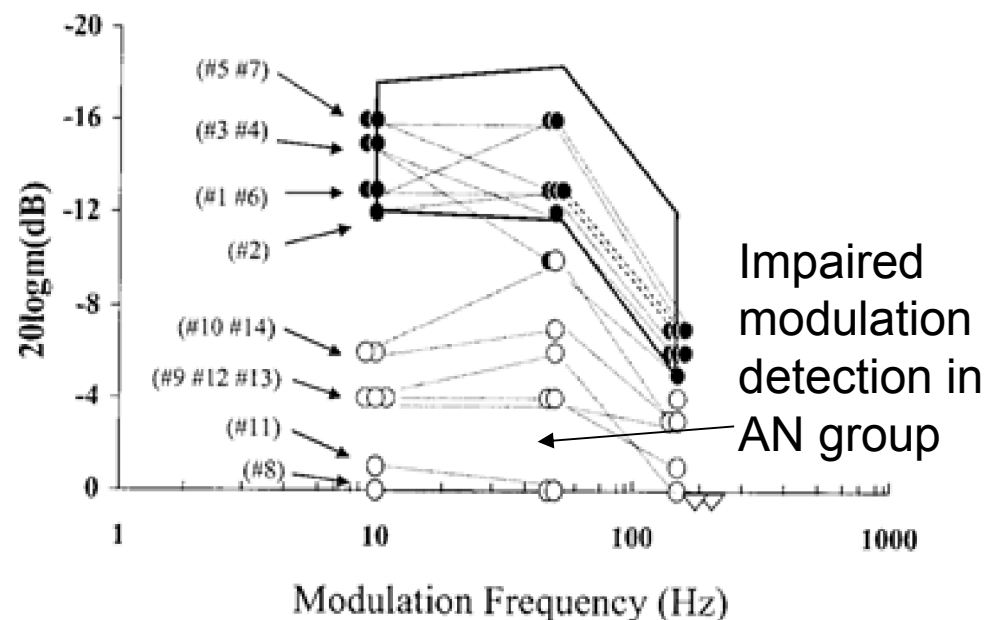


Figure 3. Amplitude modulation detection thresholds (AN subjects). Closed circles represent children in the AN  $\geq 30\%$  group, and open circles represent the children in the AN  $< 30\%$  group. Open triangles show the findings for children in the AN  $< 30\%$  group unable to detect a modulation depth of 0 dB. The enclosed area shows the mean  $\pm 2$  SD range for the normal-hearing group.

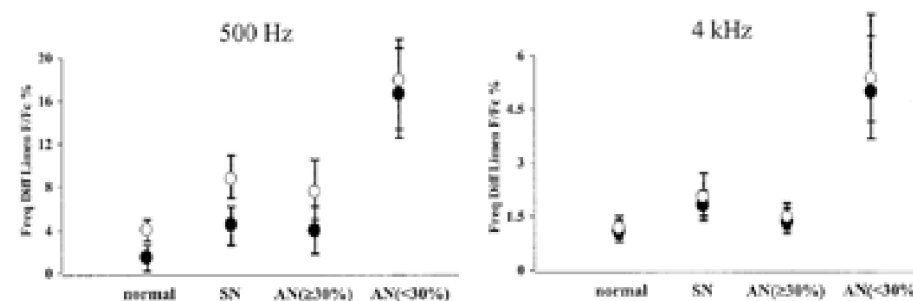

Frequency discrimination thresholds at 500 Hz and 4 kHz

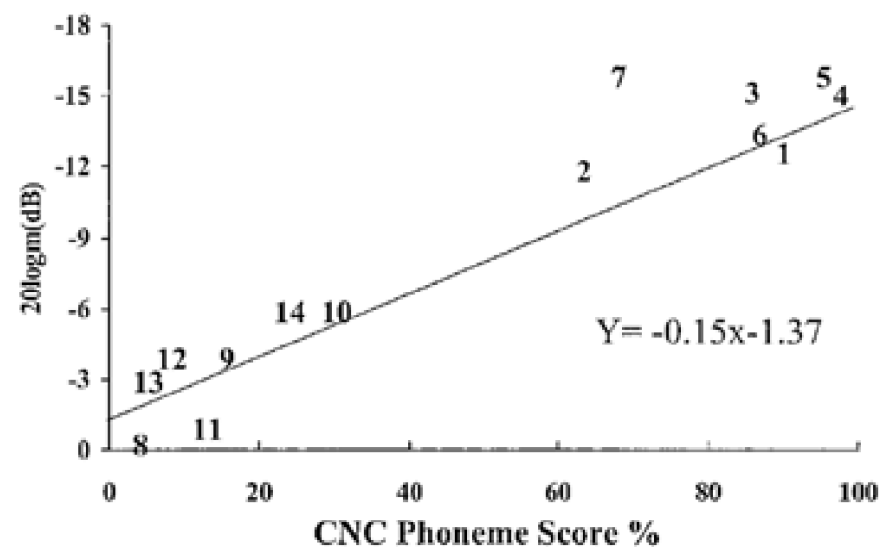


Figure 4. Amplitude modulation detection threshold (10 Hz MF) plotted as a function of CNC phoneme score (AN subjects). The data point for each child is represented by the subject identification number.


# Temporal resolution and temporal frequency coding seems impaired in ANSD

- And both correlate highly with speech scores
- While auditory filtering seems near-normal in many of the ANSD subjects

# A model of temporal resolution – the temporal window



FIGURE 5.9 A block diagram of a model of temporal resolution.

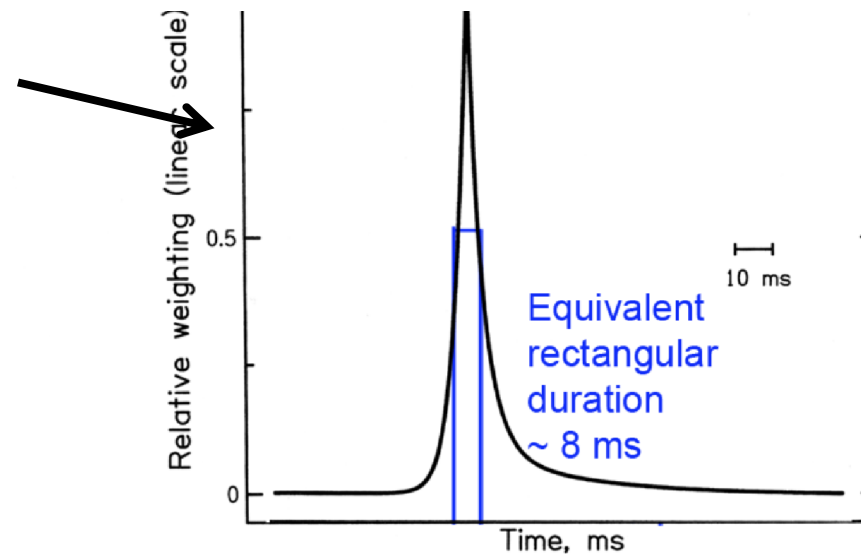


LTI system characterised by a frequency response or ... ?

FIGURE 5.10 The “shape” of the sliding temporal integrator (window). This is a weighting function applied to the output of the nonlinear device. It performs a weighted running average of the output of the nonlinear device. The shape is plotted on a linear scale as a function of time.




# A model of the auditory periphery

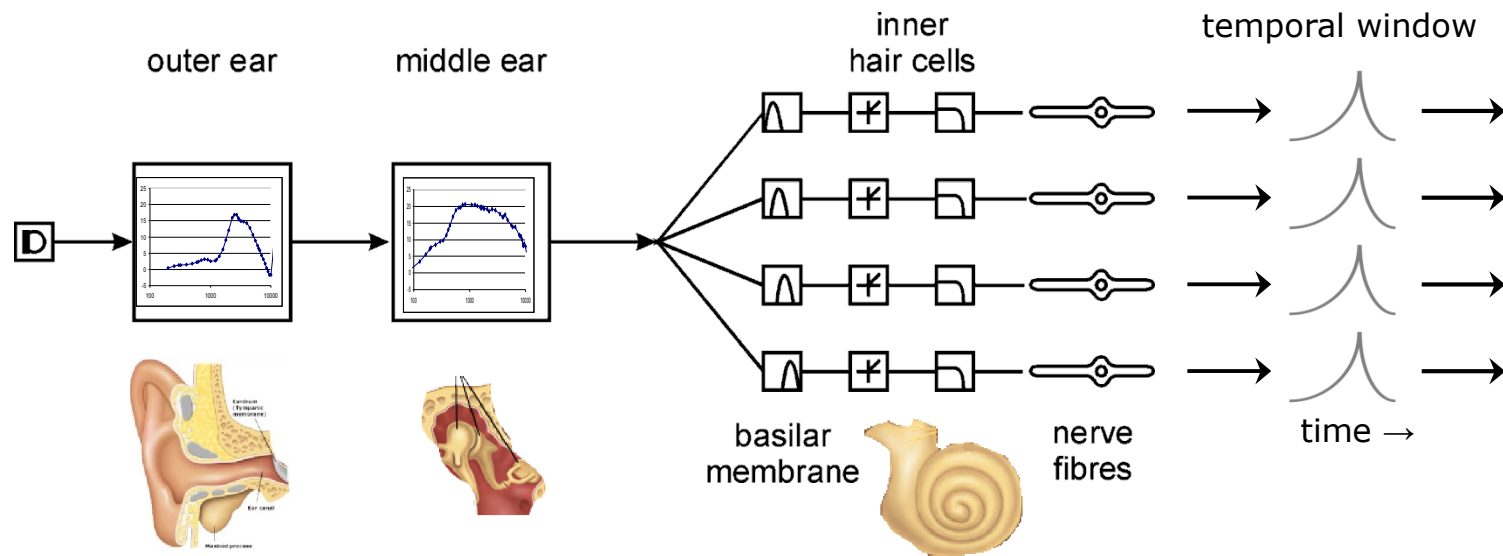

# Hydraulic analogy: How long before the next bucket leaves for the brain?


a bunch of auditory nerve fibres

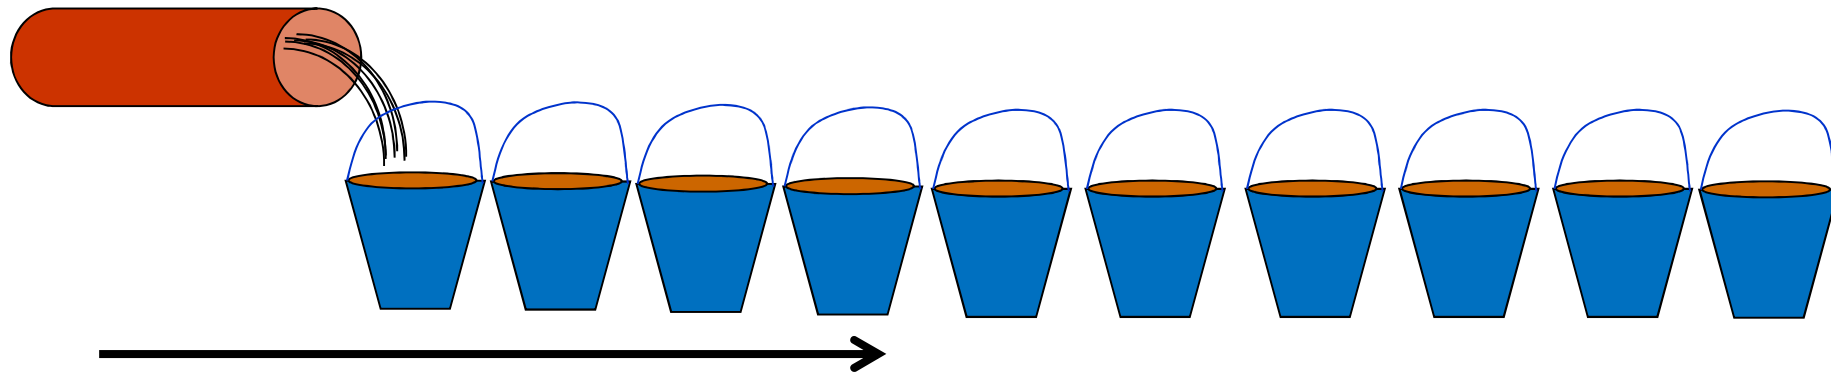

to the brain

slow modulations

# Hydraulic analogy: How long before the next bucket leaves for the brain?

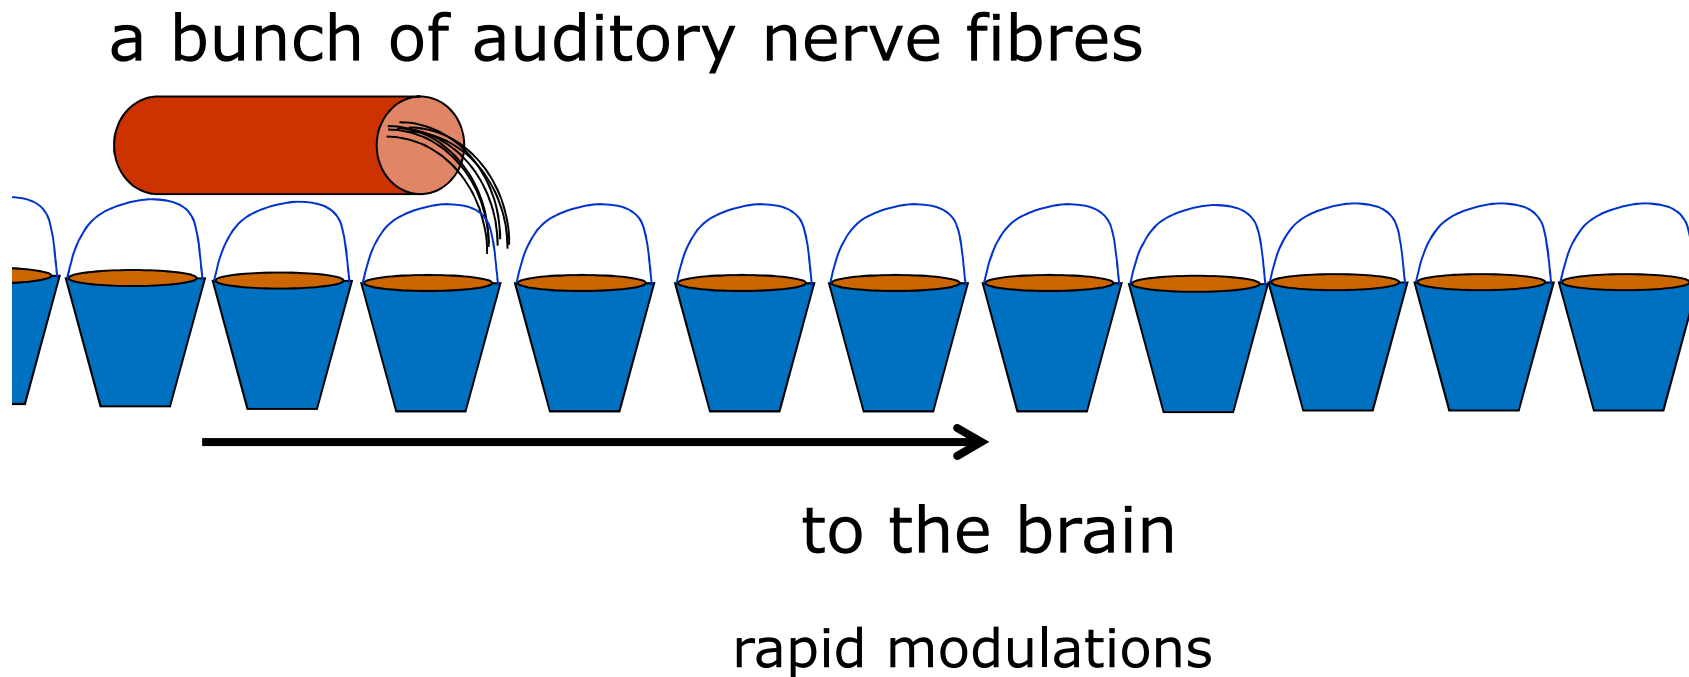

(slides modified from Lynne Werner, U of Washington, Seattle)

# A model of temporal resolution – the temporal window

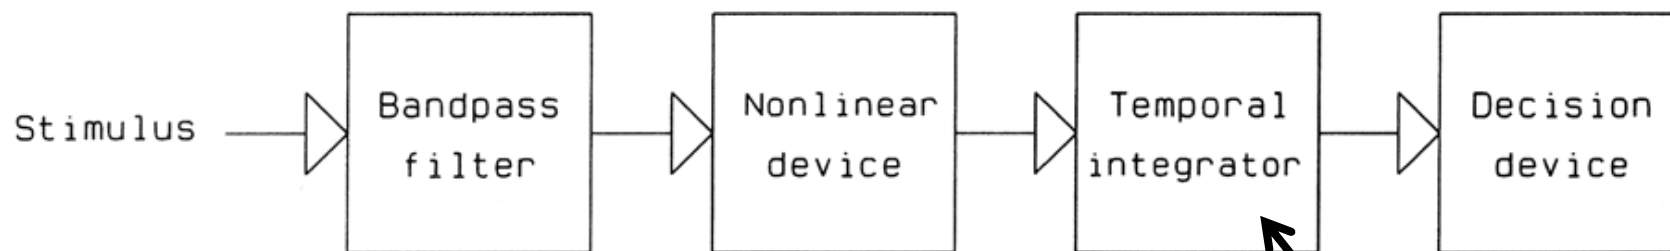


FIGURE 5.9 A block diagram of a model of temporal resolution.


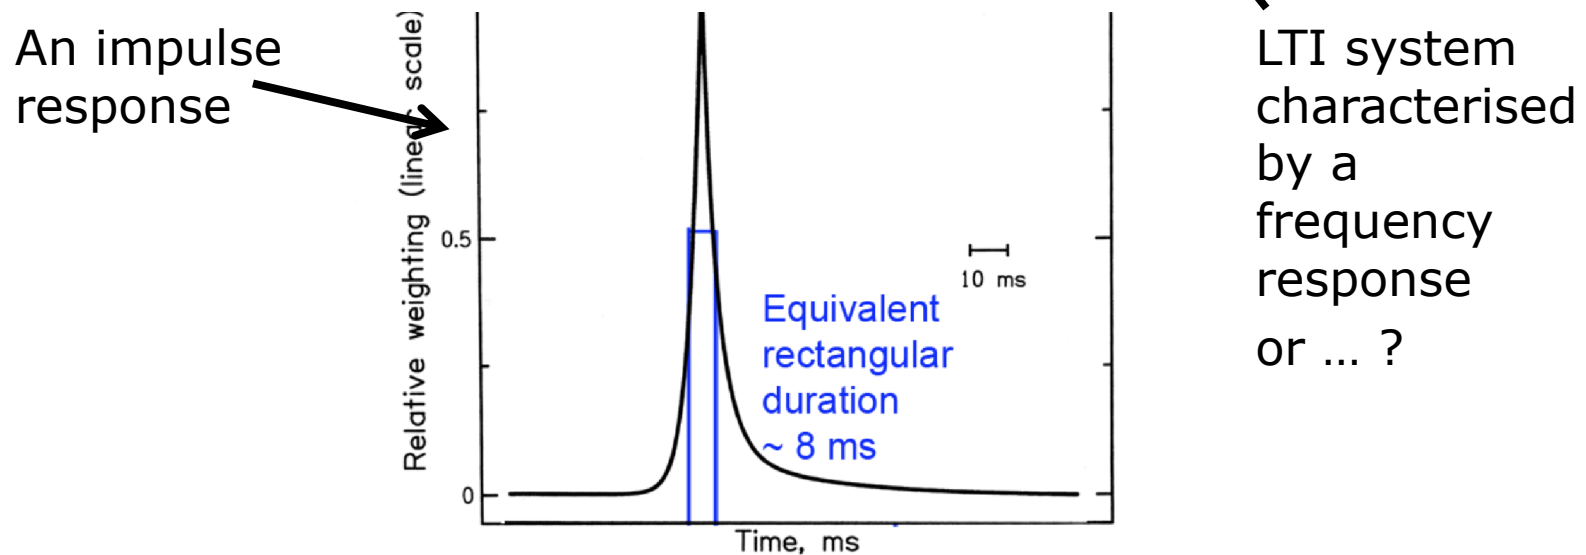



FIGURE 5.10 The “shape” of the sliding temporal integrator (window). This is a weighting function applied to the output of the nonlinear device. It performs a weighted running average of the output of the nonlinear device. The shape is plotted on a linear scale as a function of time.

# The temporal window as a kind of smearing

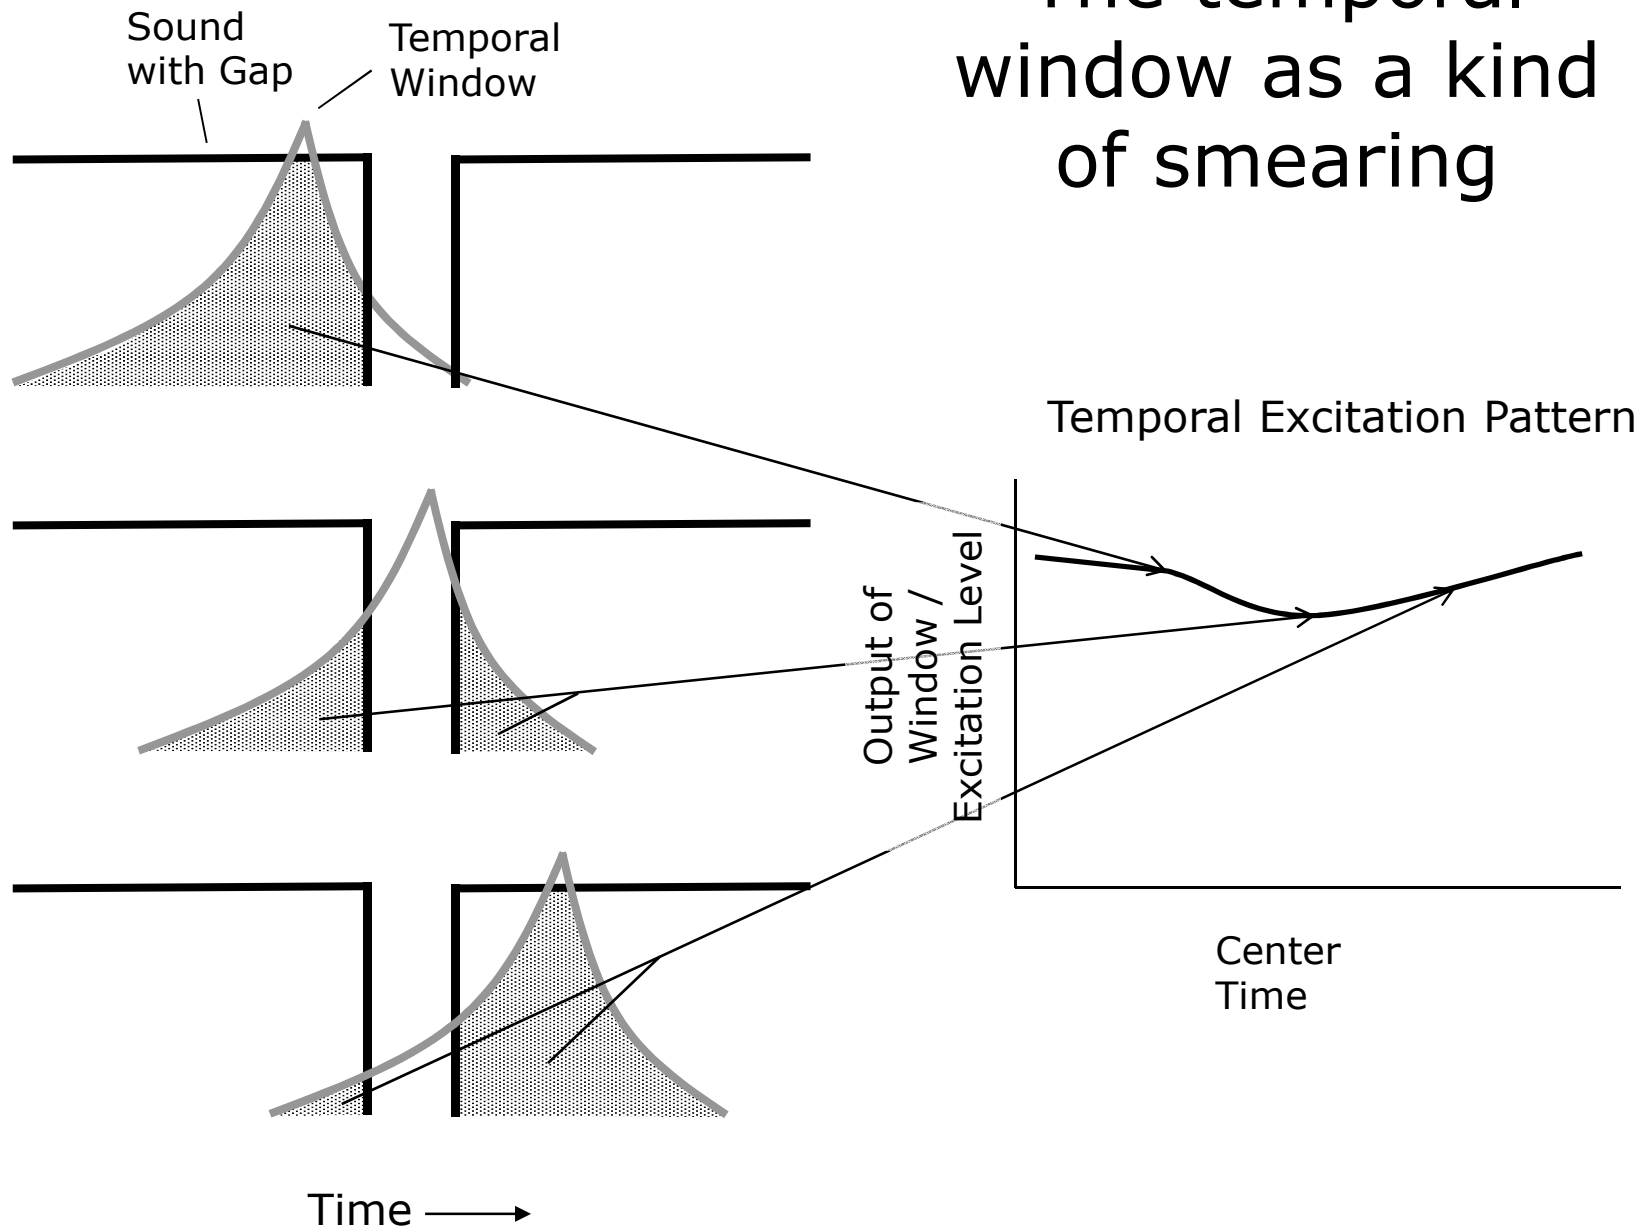

slide courtesy of Chris Plack, 2013

# gap detection seen through the temporal window model

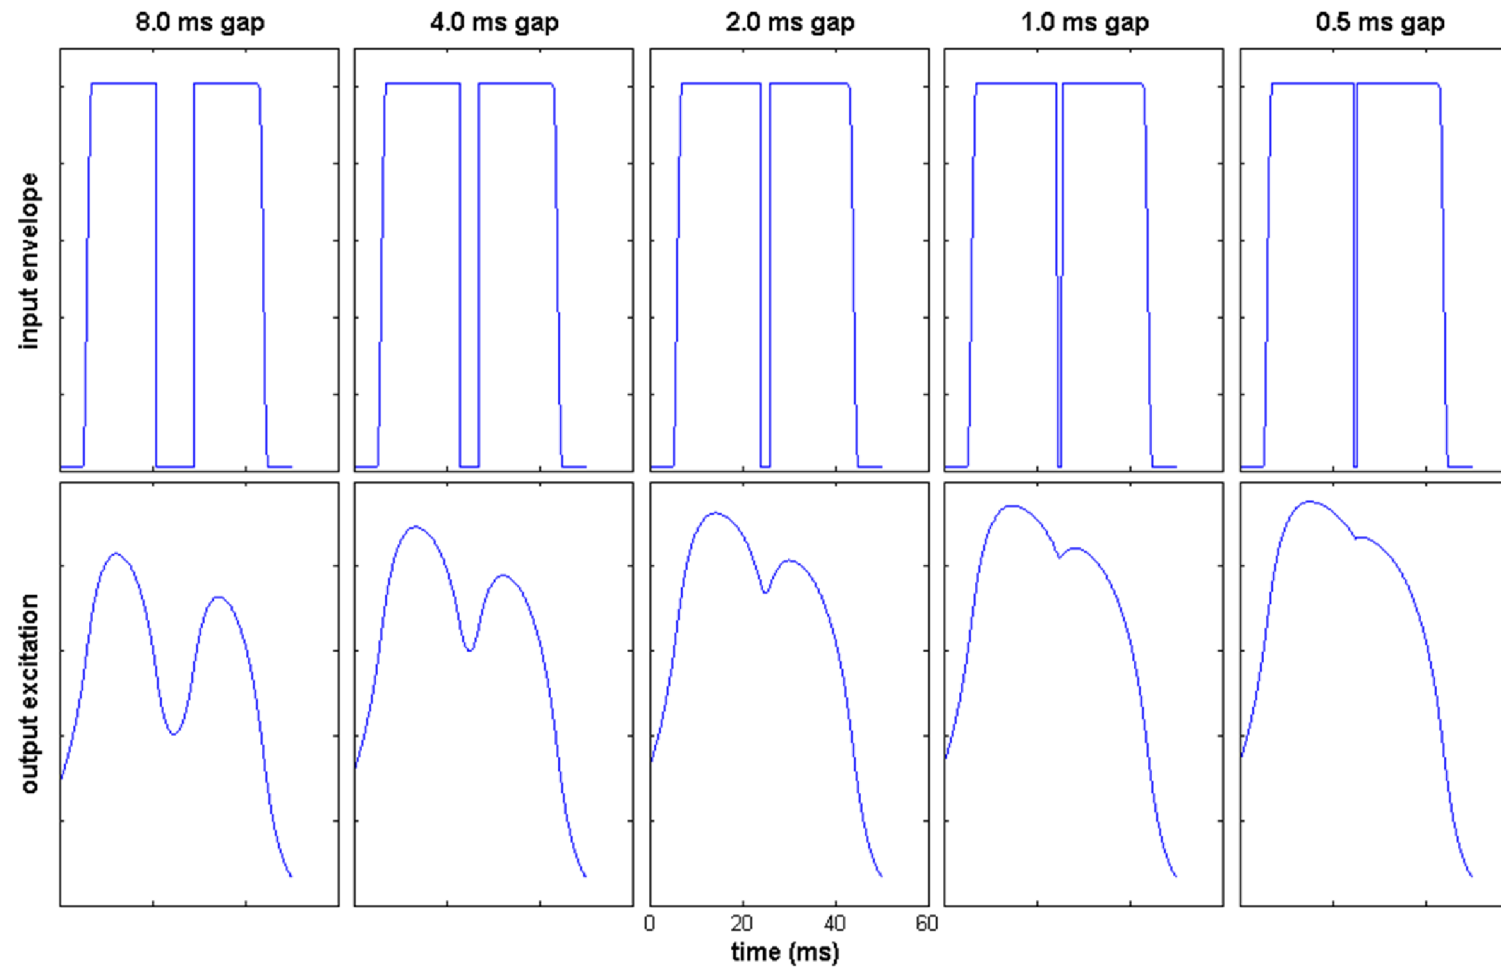

# Effects of temporal window on signals


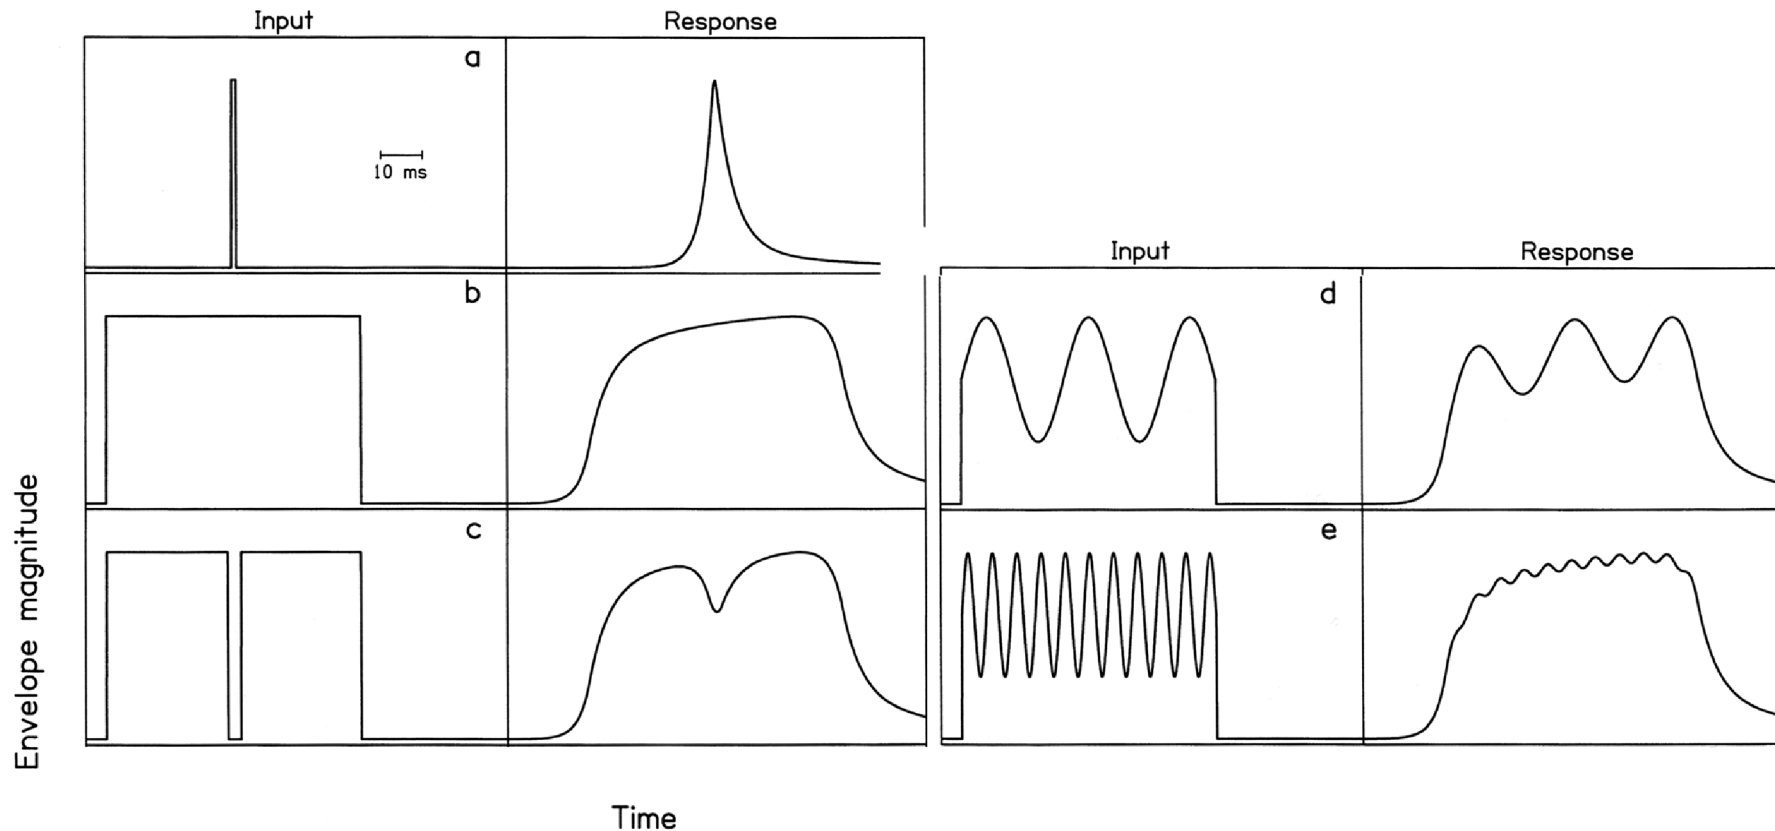


FIGURE 5.11 Examples of the influence of the sliding temporal integrator on the envelopes of sounds. The panels on the left show inputs to the sliding temporal integrator. The panels on the right show the corresponding outputs.

Decision device looks at evidence of level changes at output – a model of *within-channel* temporal resolution



# Envelope in speech – one source of cues to consonants



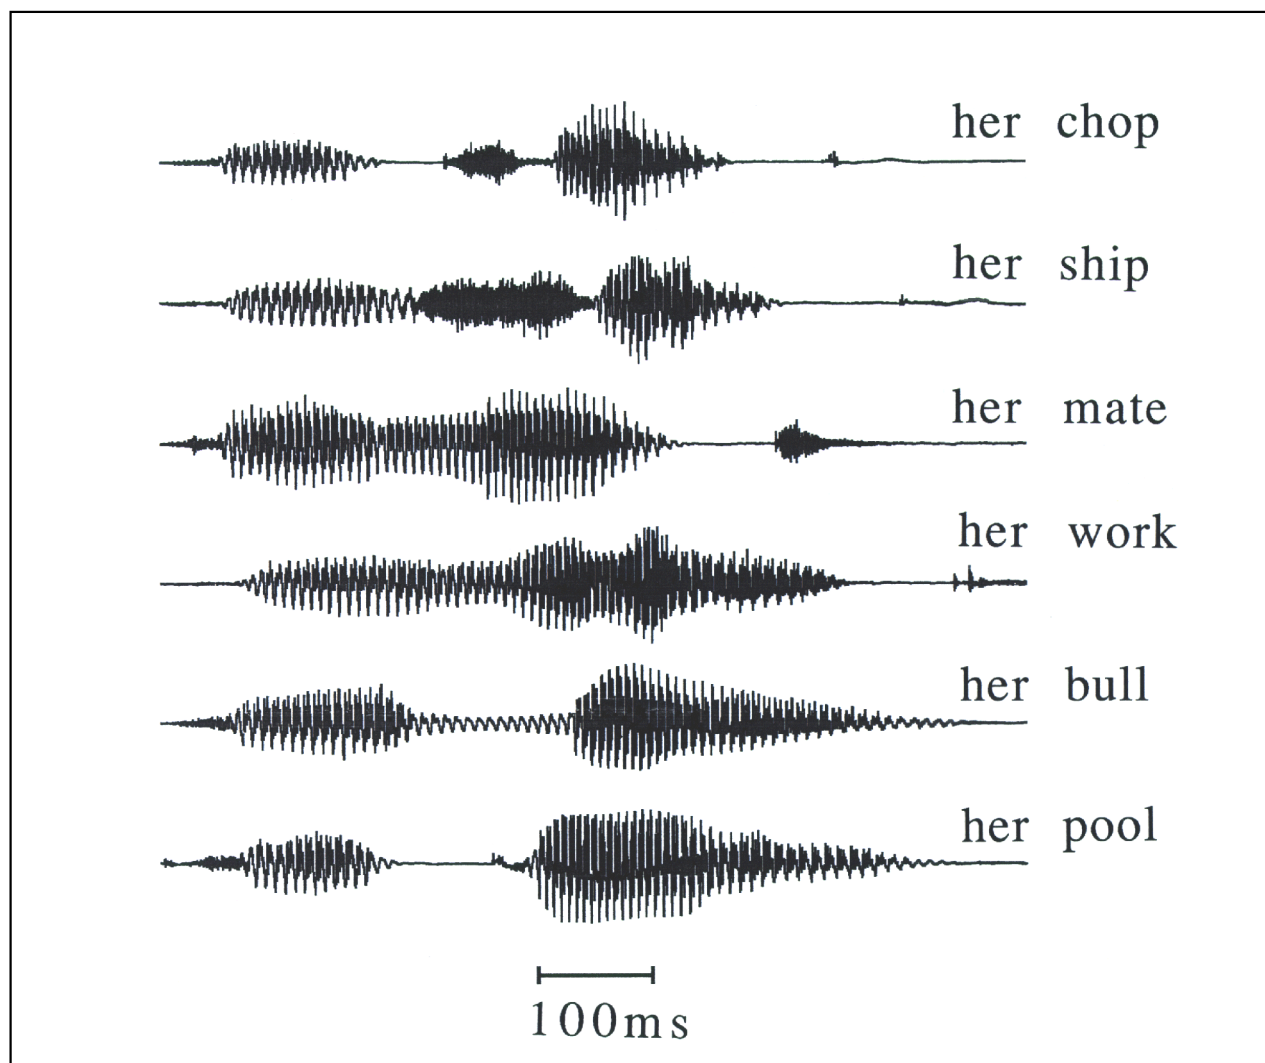

Neural synchrony declines from 1.5 kHz - upper limit 4 kHz

AM detection declines from 80 Hz - upper limit ~ 500 Hz

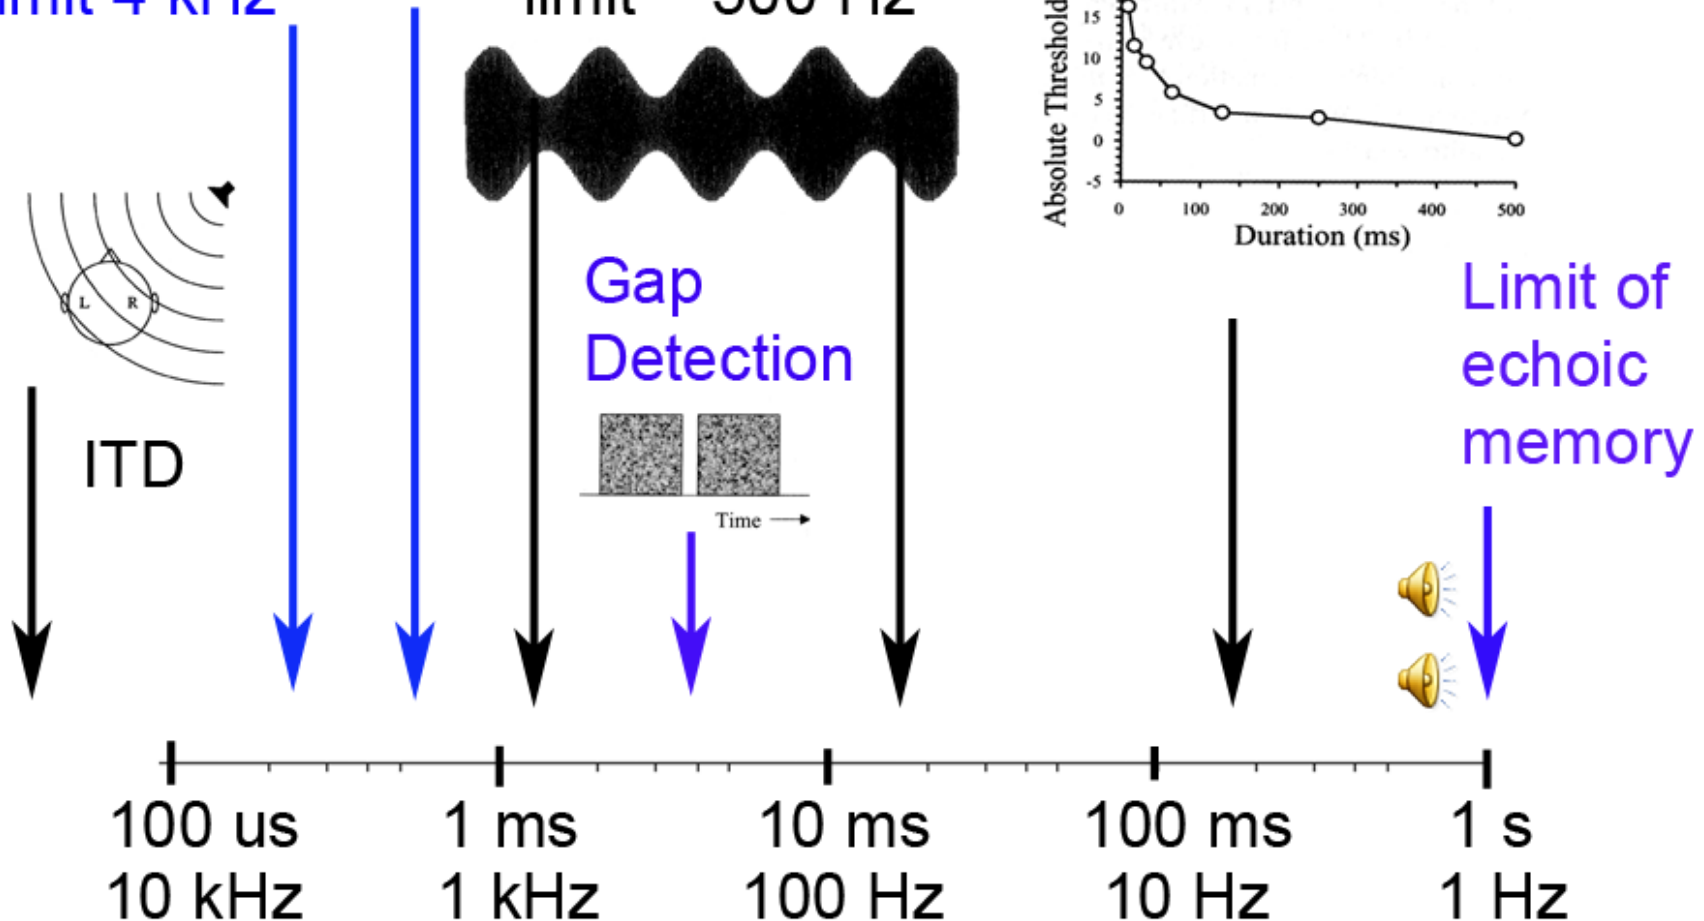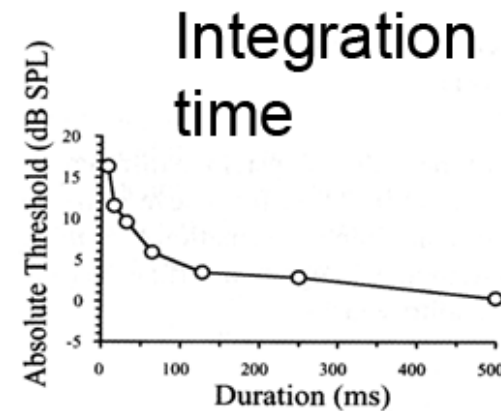

Limits for fine structure | Limits for envelope

# Key Points

- Measures of temporal resolution relate to signal envelopes
- Measures must control spectral artefacts
- Gap detection and TMTF main measures
  - Both indicate limits in region of 1 to 3 ms in normal hearing
- Temporal window model can account reasonably well for within-channel temporal resolution