



# AUDL 4007 Auditory Perception

Week ?

Psychoacoustic  
reflections of  
frequency  
selectivity

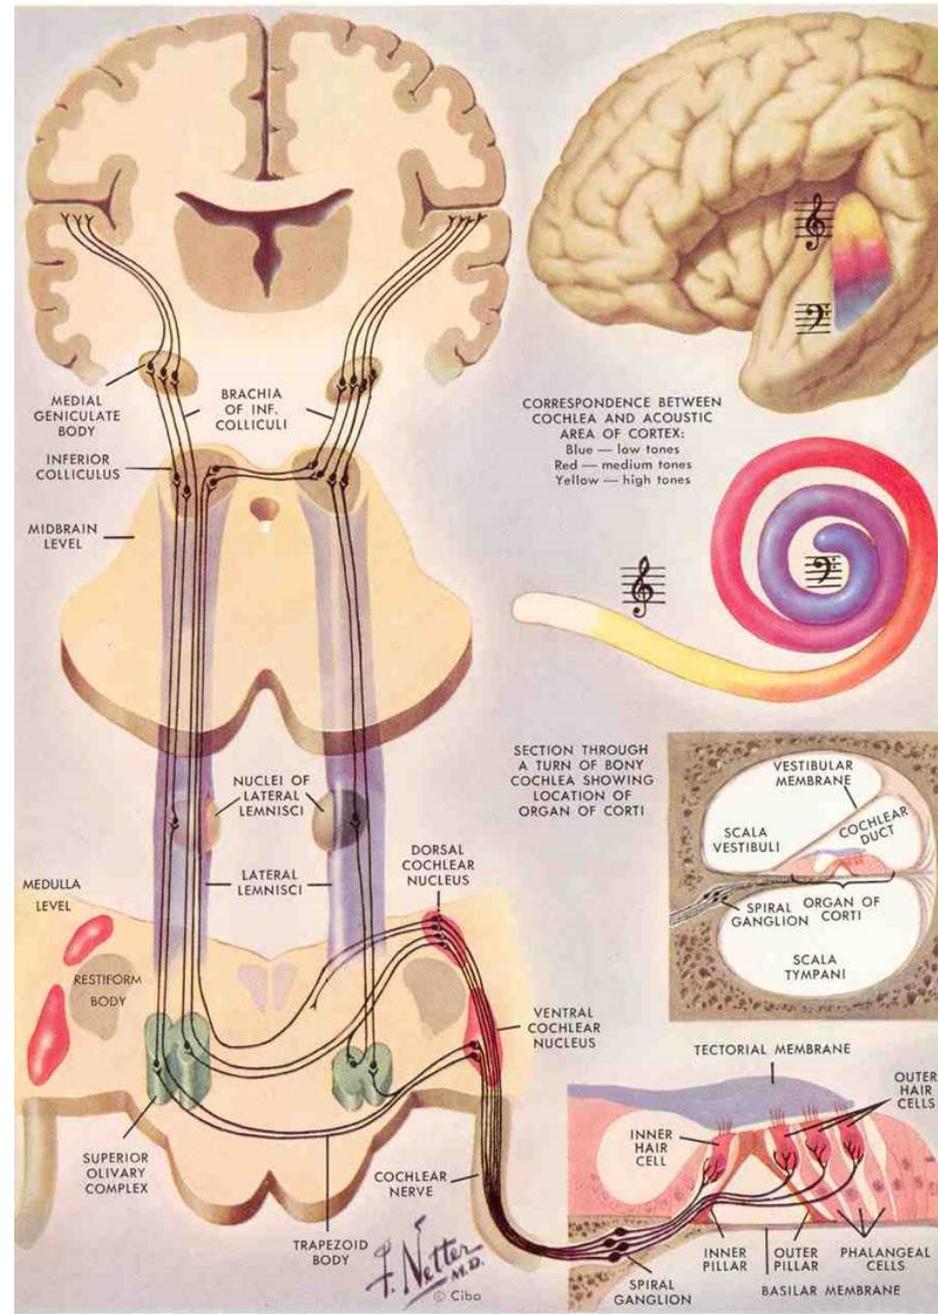


# Auditory Nerve Structure and Function

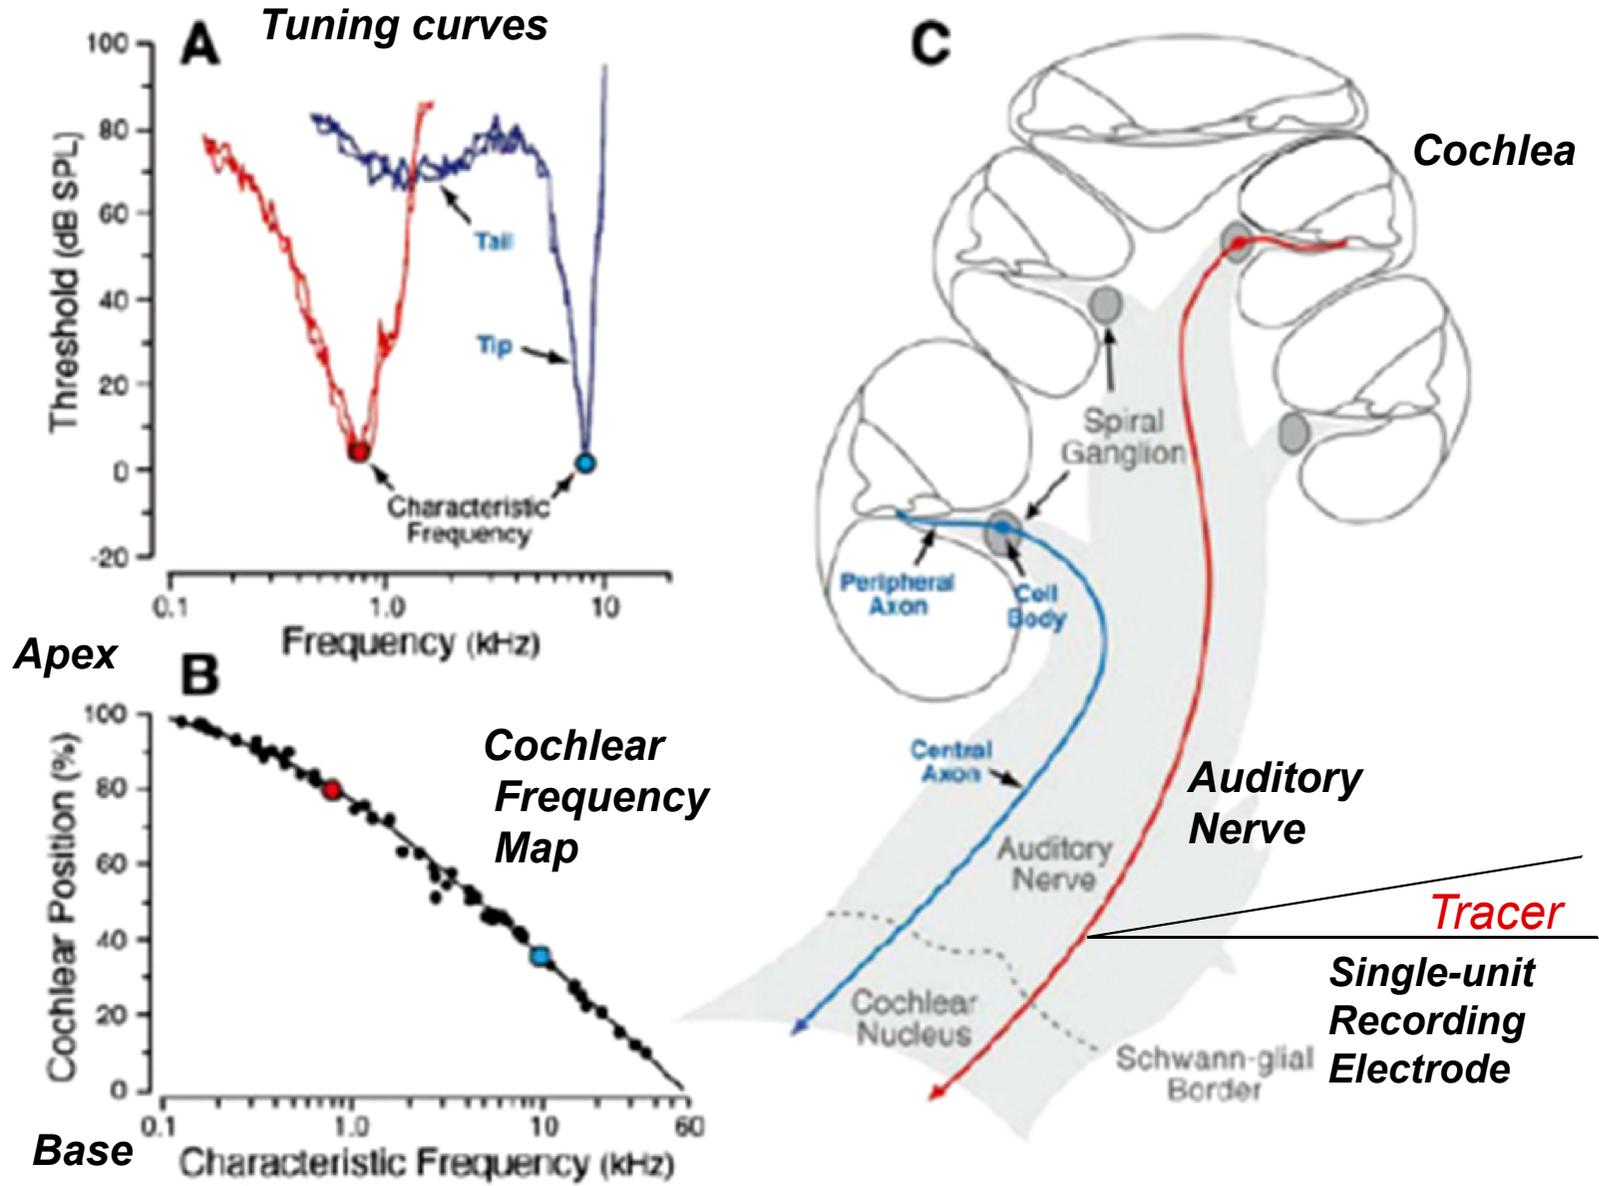


Liberman (1982)

# A mechanical model of the cochlea

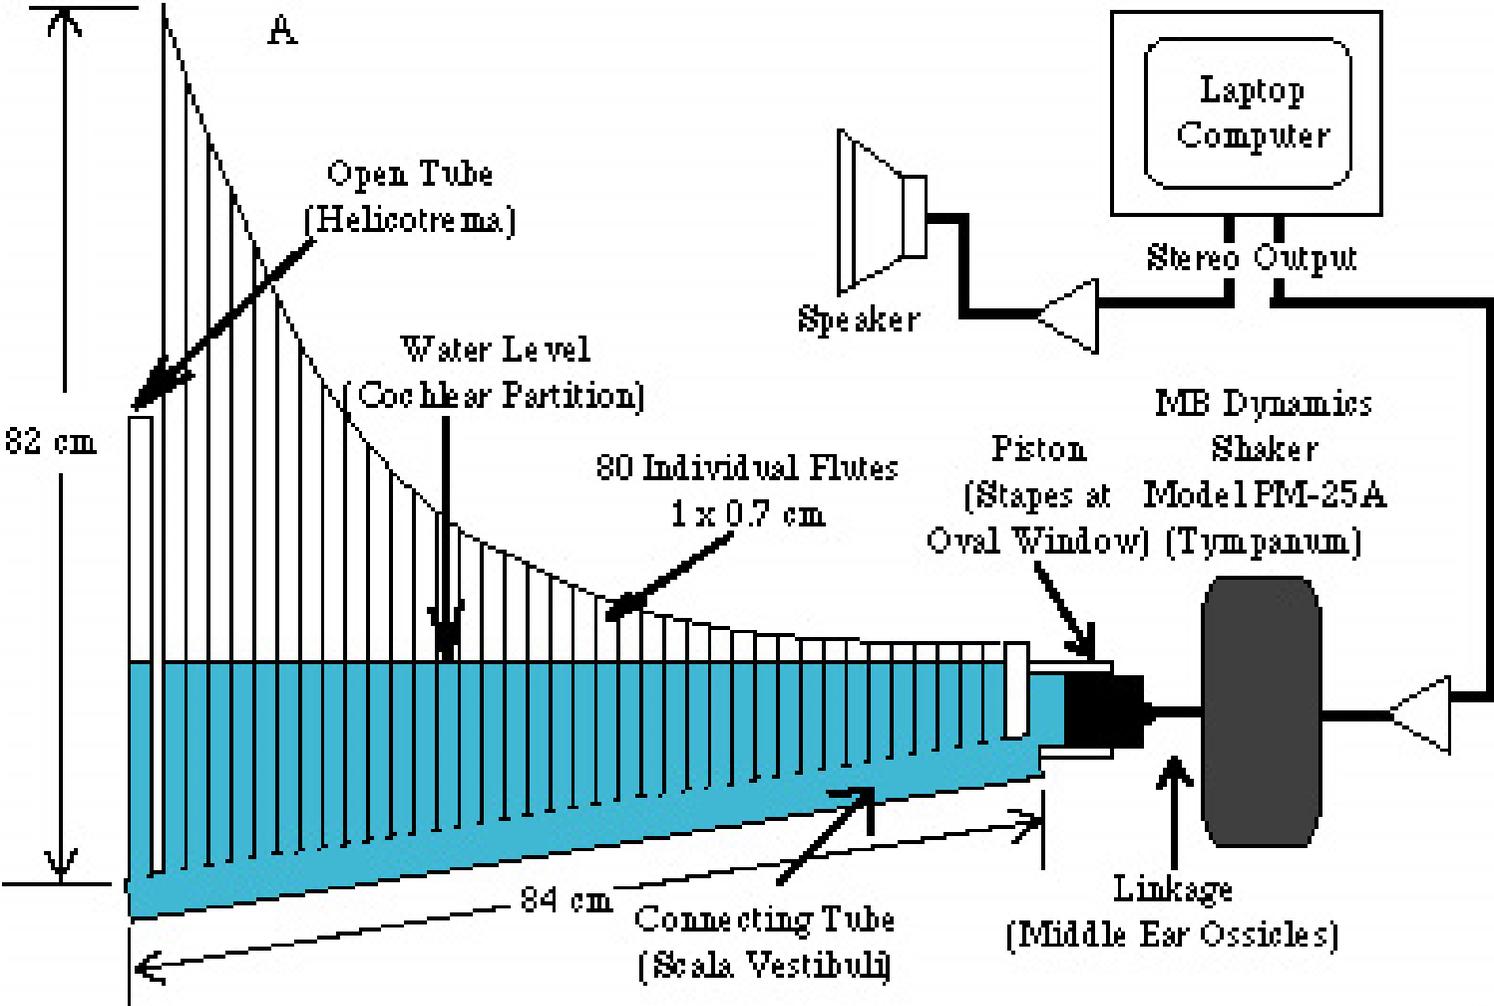

# The auditory periphery as a signal processor

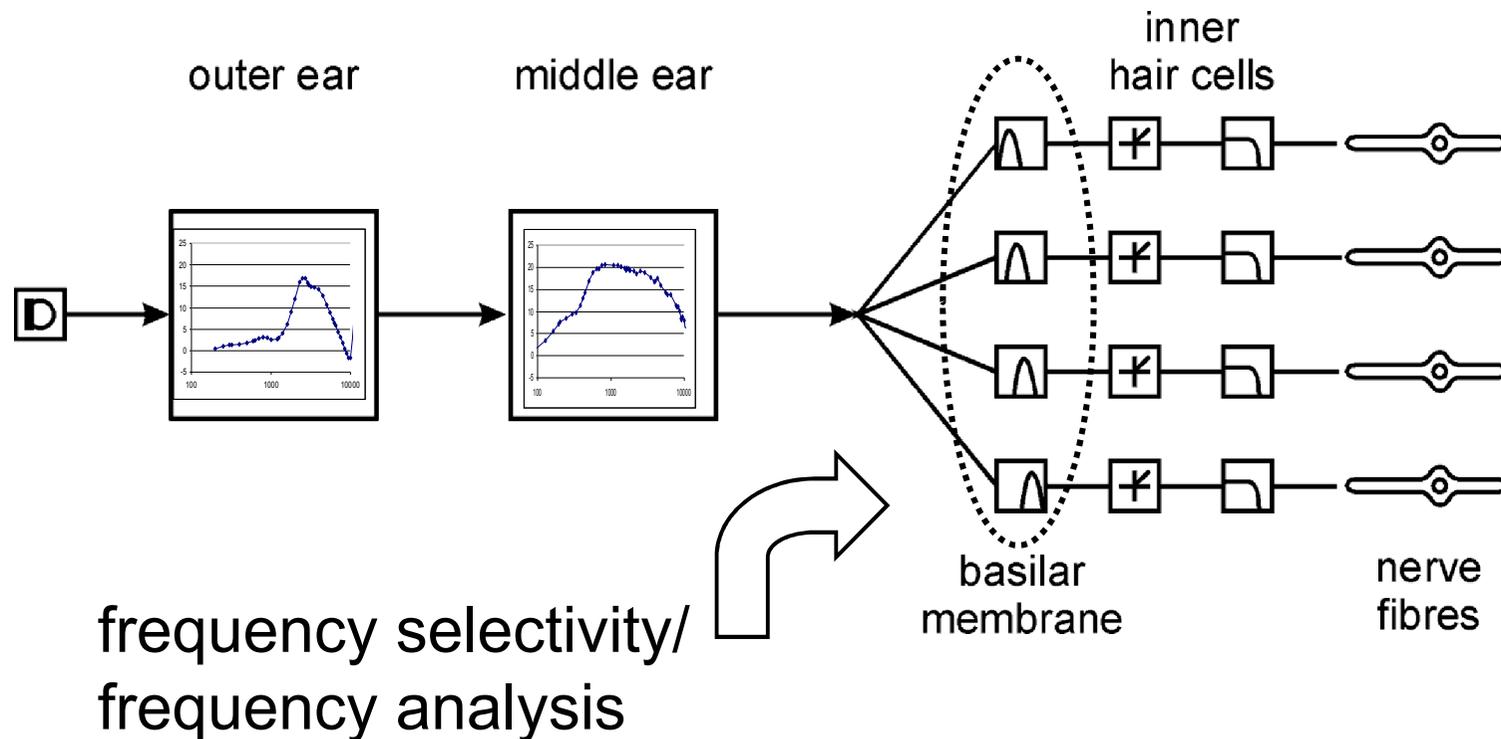

*auditory filters & channels*

# Masking experiments

- Listen for a probe (typically a sinusoid) in a background of a masker with a variety of spectral shapes (typically a noise).
- Assume: A listener has independent access to, and can 'listen' selectively to the output of an individual auditory filter – the one that will give best performance.
  - *the probe frequency controls the centre frequency of the auditory filter that is attended to*
- Assume: Only noise that passes through the same filter as the sinusoid can mask it.
- Assume: Only the 'place' principle applies — no temporal information.
- The *power spectrum model of masking*

# The frequency specificity of masking


- Listen for a set of three pulsing tones (the *signal* or *probe*).



- These will alternate with masking noises that occur twice each, and change through the series.
- If two masking noises in a row sound identical, then you can't hear the probe tone — it has been *masked*.
- When is the tone masked, and when not?


# The masked audiogram

*For a fixed narrow-band masker, determine the change in threshold for sinusoidal probes at a wide variety of frequencies.*



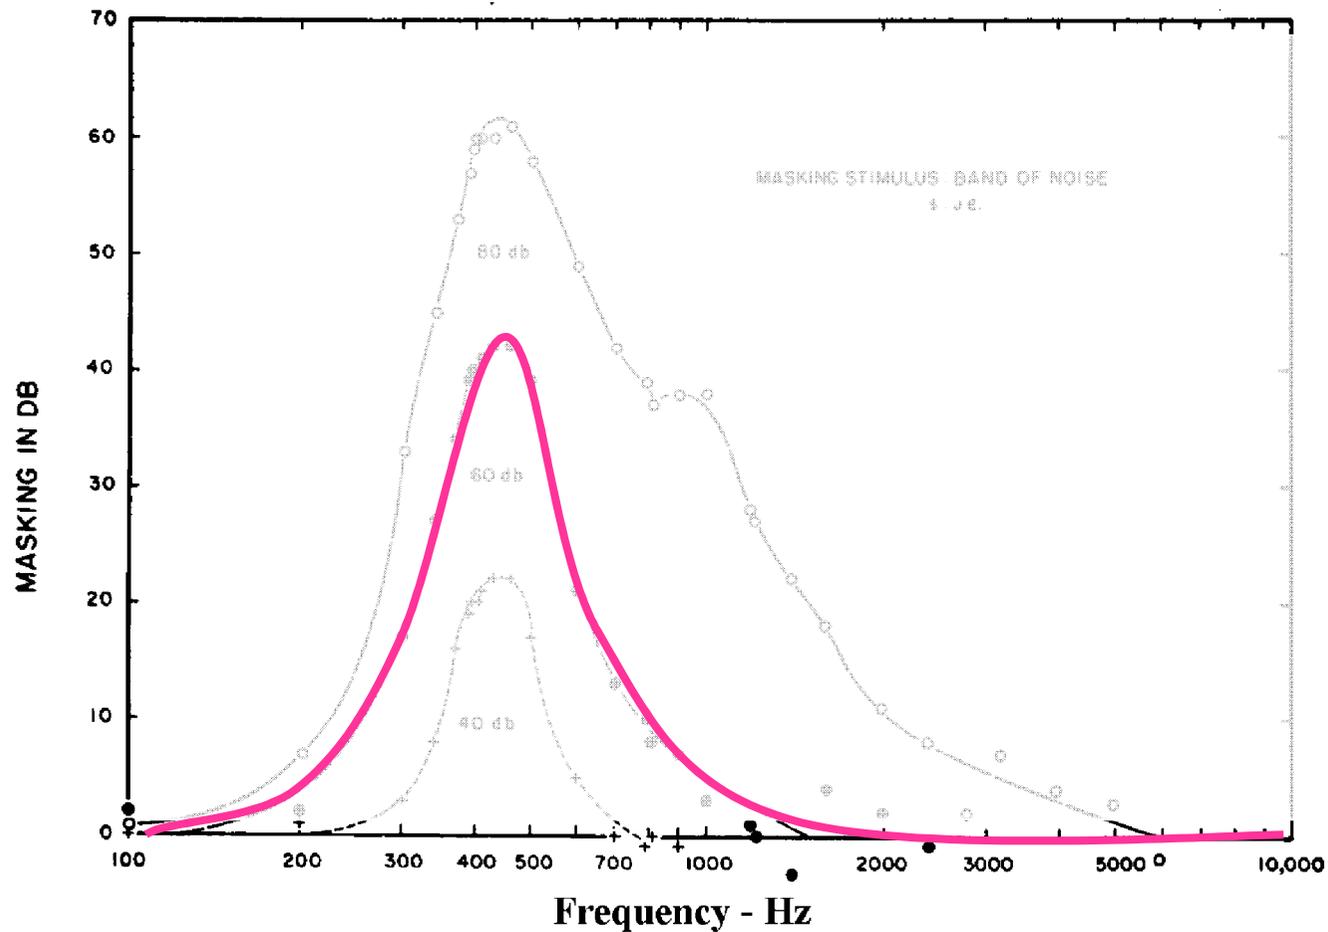


# The masked audiogram

*Is a masked audiogram a correlate of an excitation pattern (something like a spectrum) or a tuning curve (something like a frequency response)?*

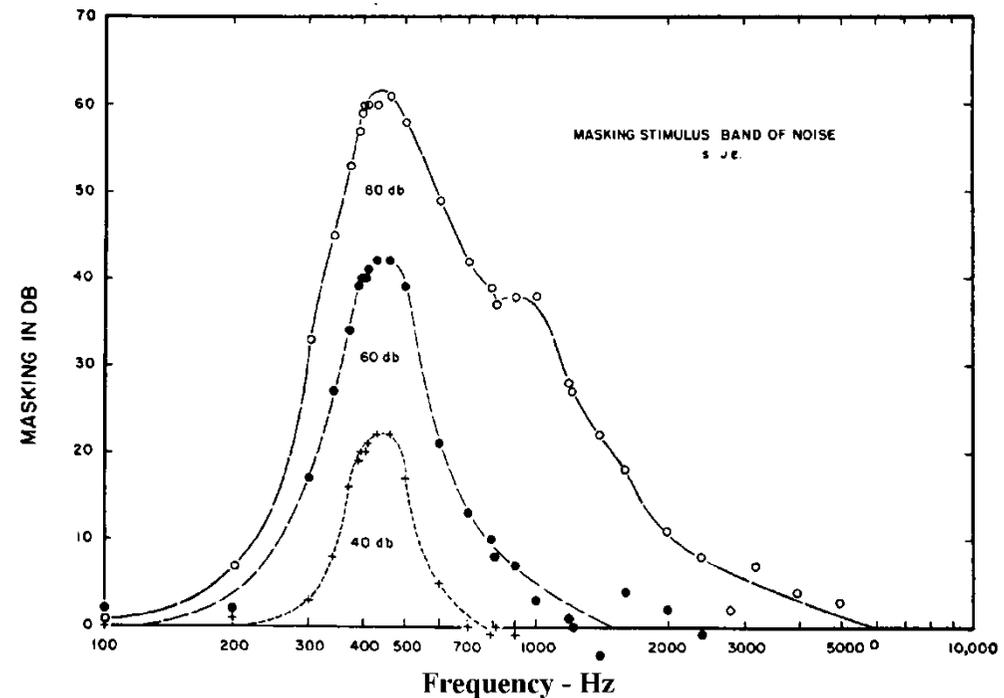


# Psychophysical tuning curves (PTCs)

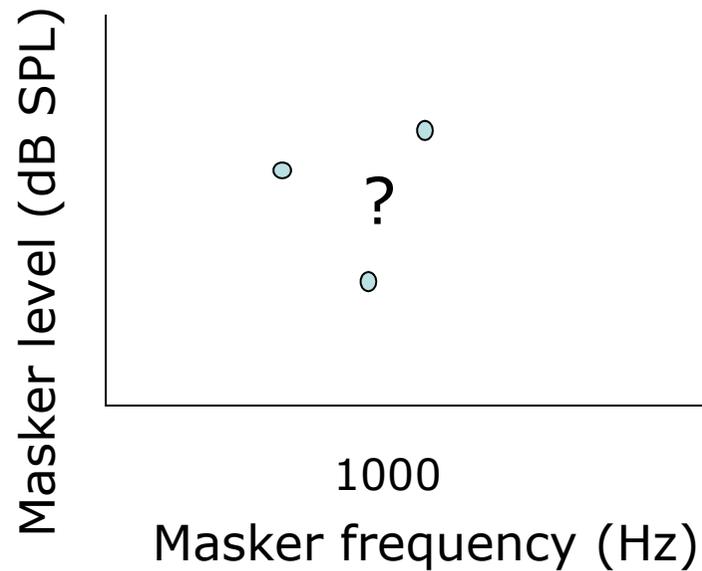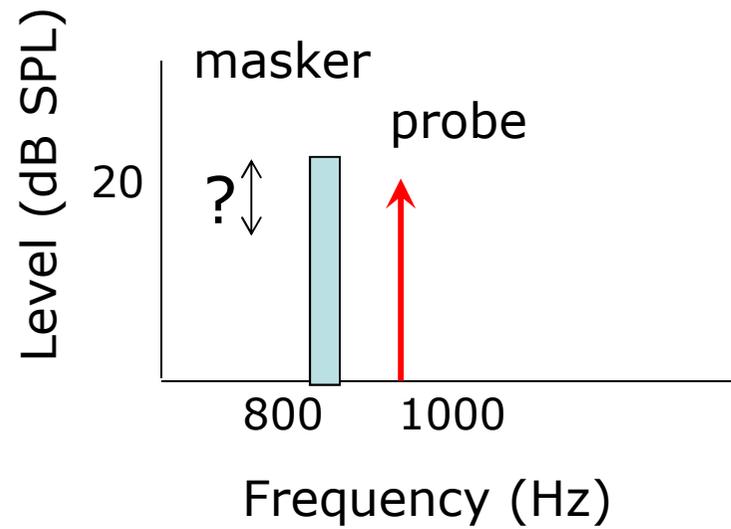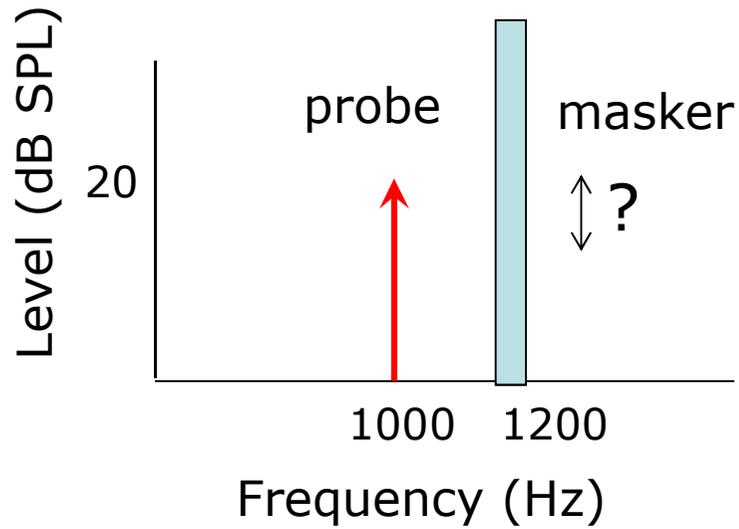


# Psychophysical tuning curves (PTCs)

Determine the minimum level of a narrow-band masker at a wide variety of frequencies that will just mask a fixed **low-level** sinusoidal probe.

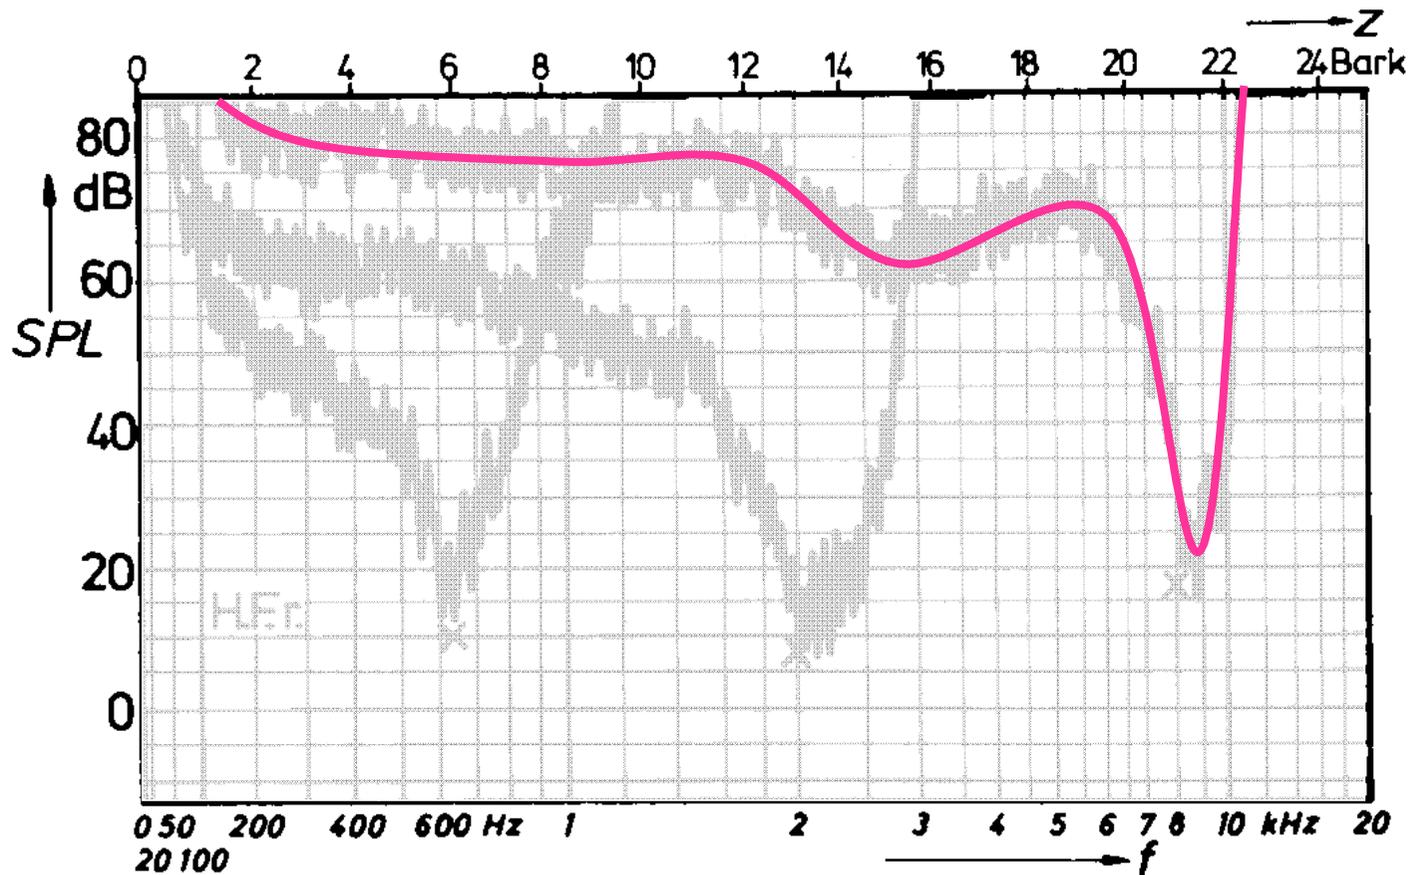

# Psychophysical tuning curves (PTCs)

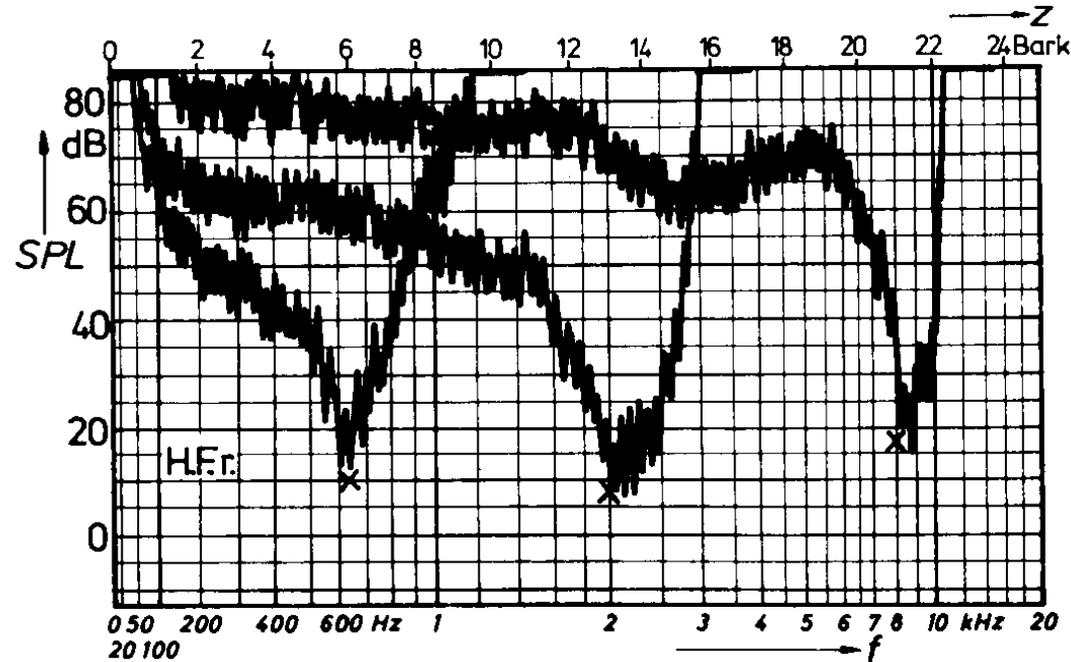

*Is a psychophysical tuning curve a correlate of an excitation pattern (something like a spectrum) or a tuning curve (something like a frequency response)?*

Why you can't easily interpret PTCs at higher levels:  
Off-frequency/place listening

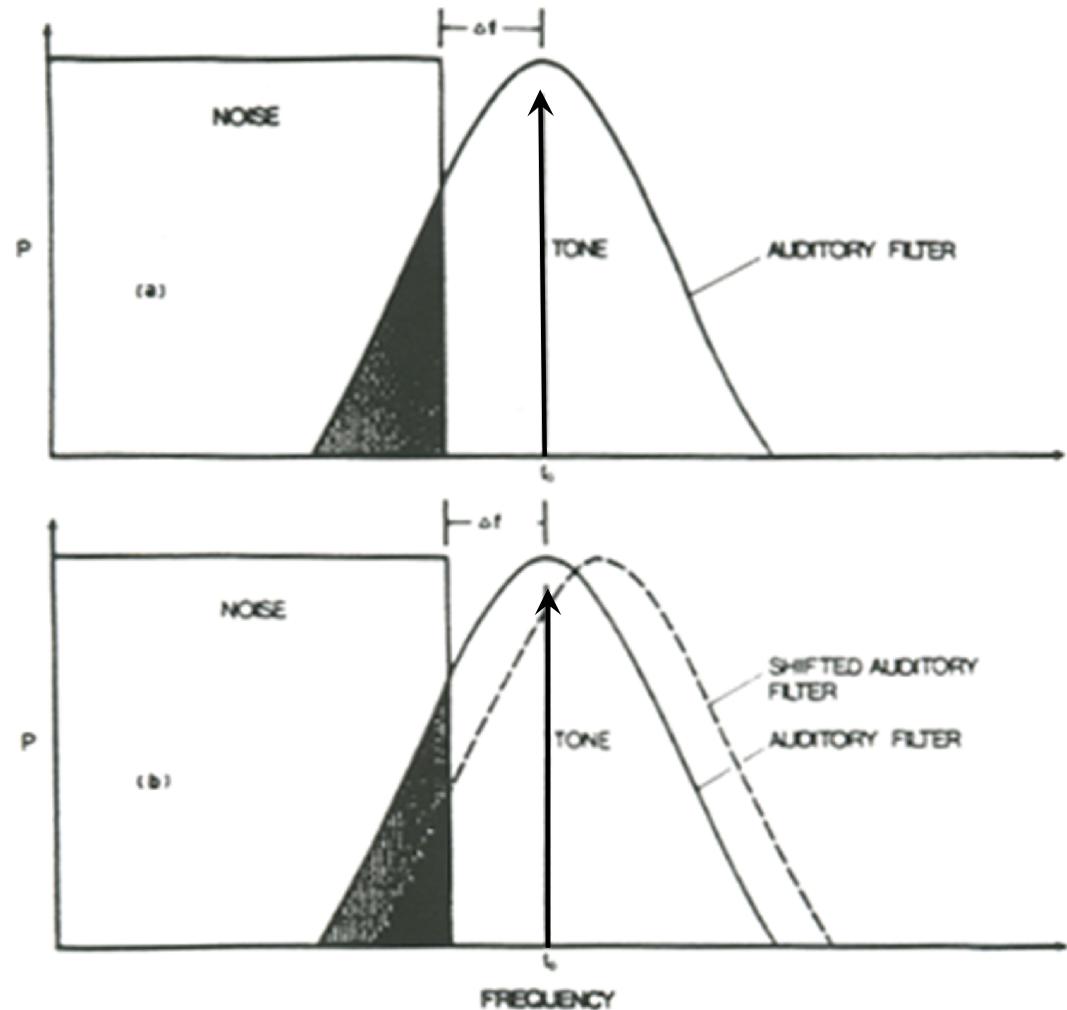
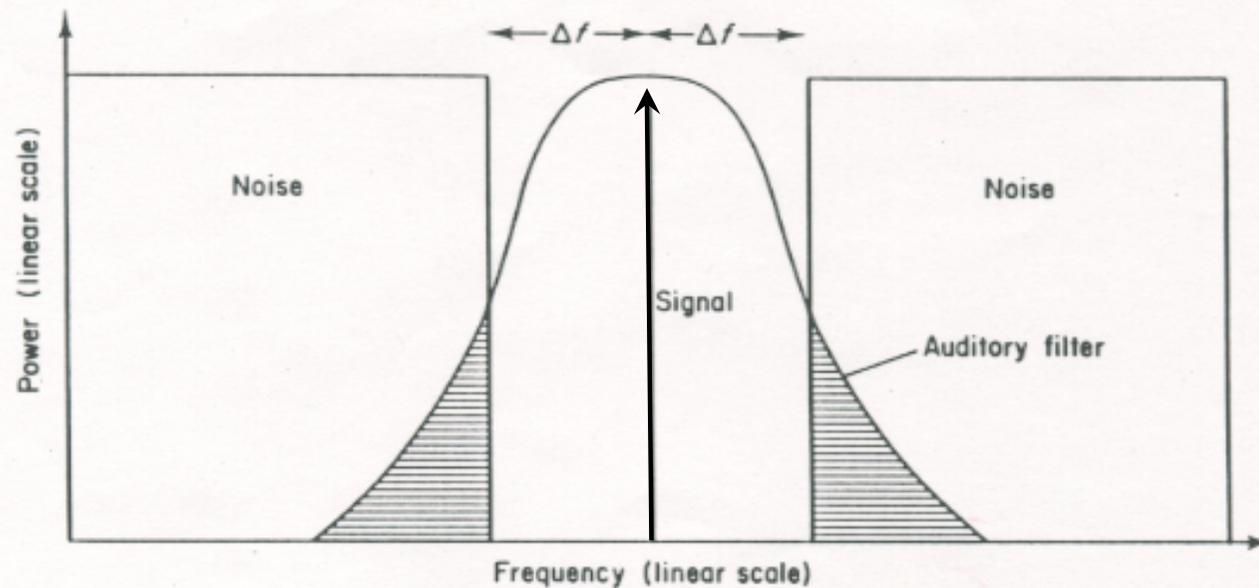



Figure 10.8 In both graphs, the solid curve represents the auditory filter centered at the test tone and the square at the left portrays a lower frequency masking noise. Off-frequency listening occurs when the subject shifts to another auditory filter (indicated by the dashed curve in graph b) in order to detect the presence of a test signal. (Adapted from Patterson [33], with permission of *J. Acoust. Soc. Am.*)

# Notch (*band stop*) noises limit off-place listening






**FIG. 3.6** Schematic illustration of the technique used by Patterson (1976) to determine the shape of the auditory filter. The threshold of the sinusoidal signal is measured as a function of the width of a spectral notch in the noise masker. The amount of noise passing through the auditory filter centred at the signal frequency is proportional to the shaded areas.

# Notched noises



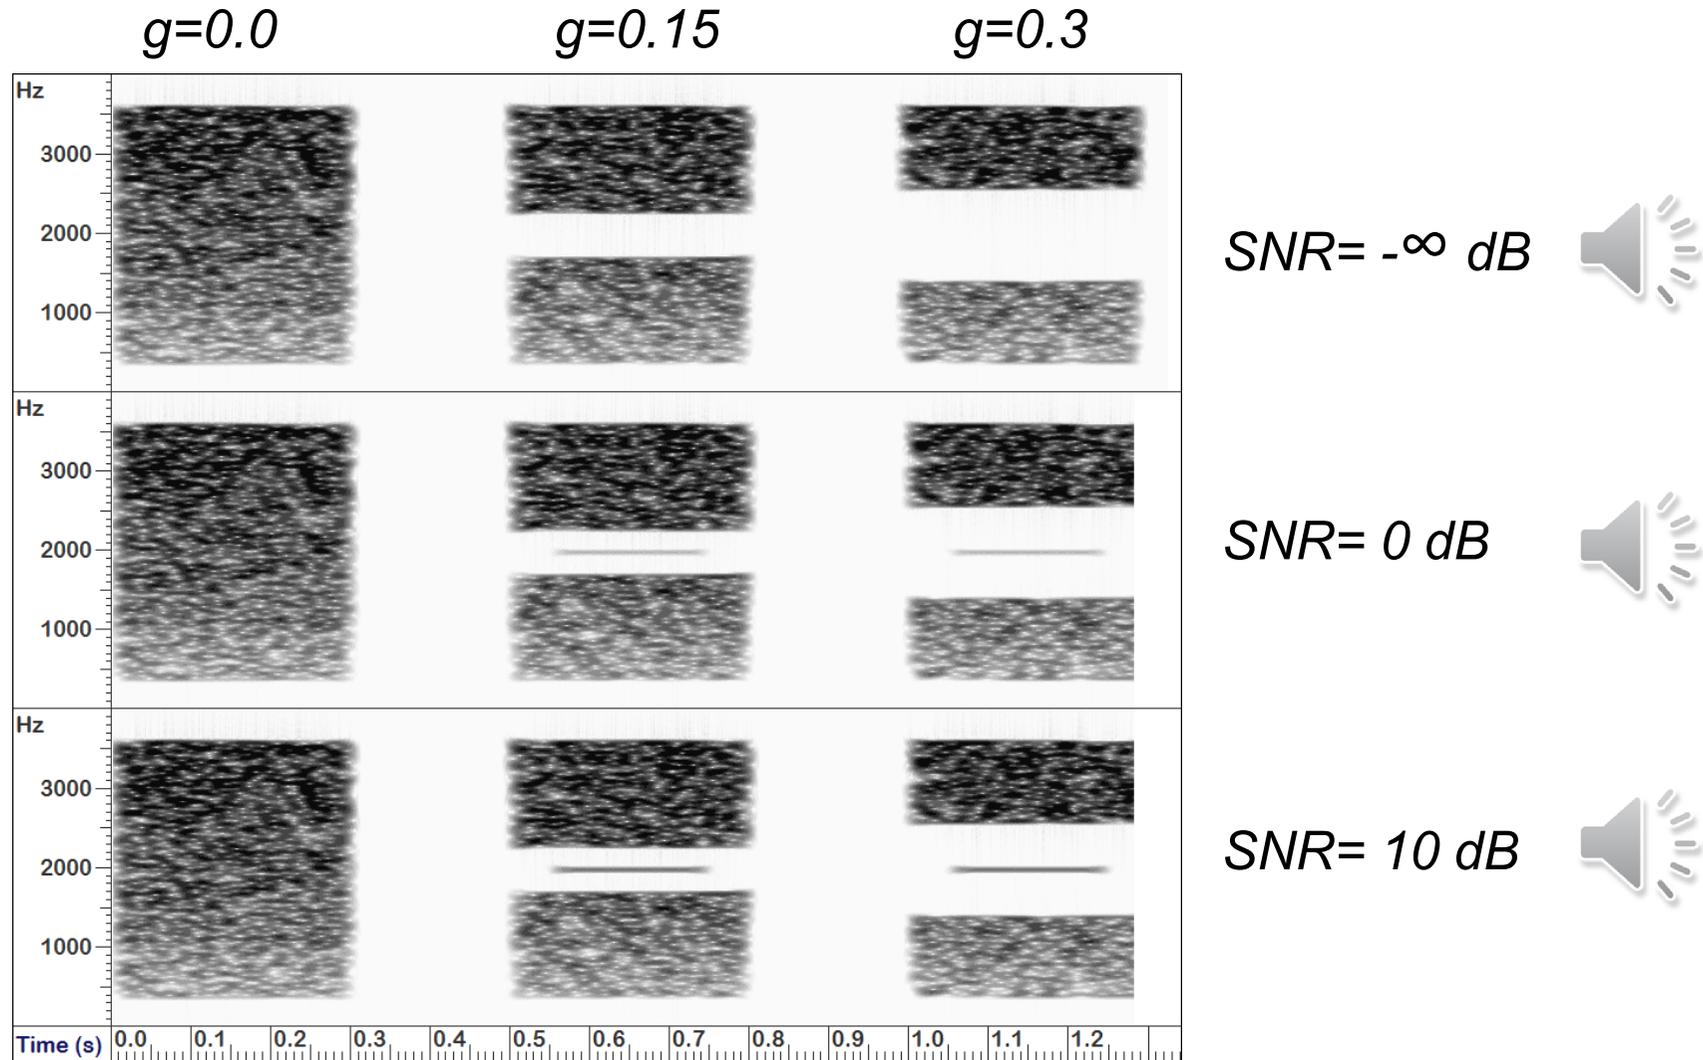


# Narrow vs broad filters

## Narrow filter

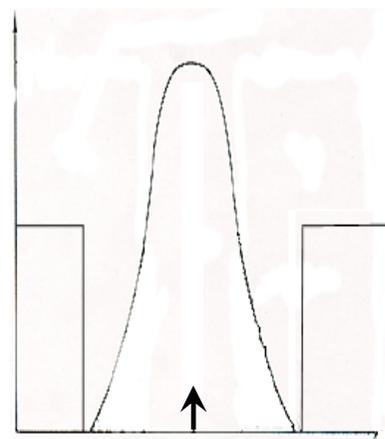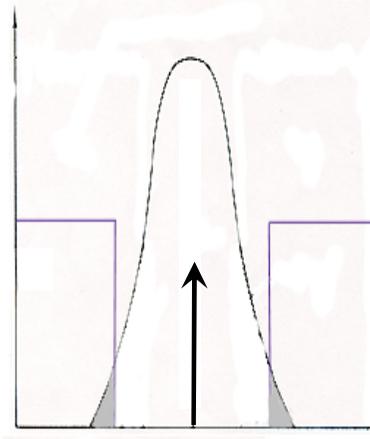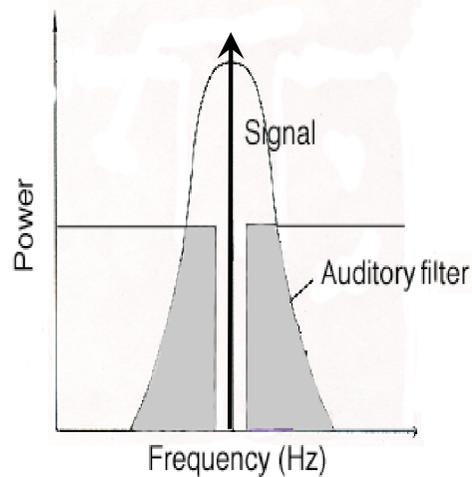


## Broad filter

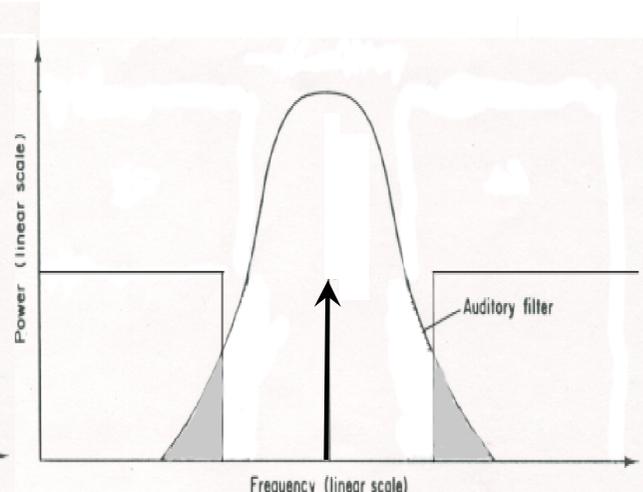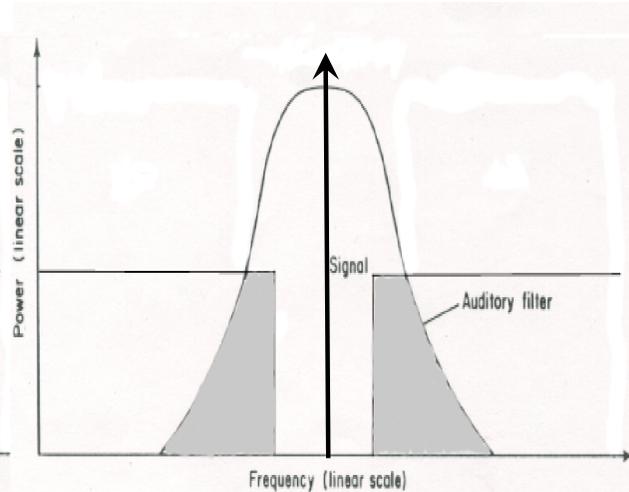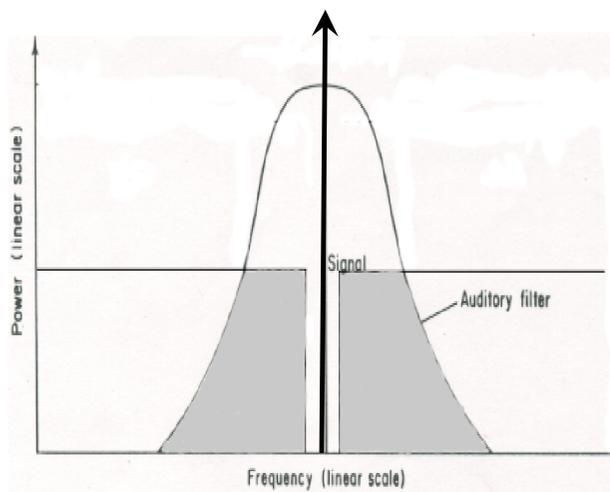


Notch gets wider →

# Thresholds at different notch widths


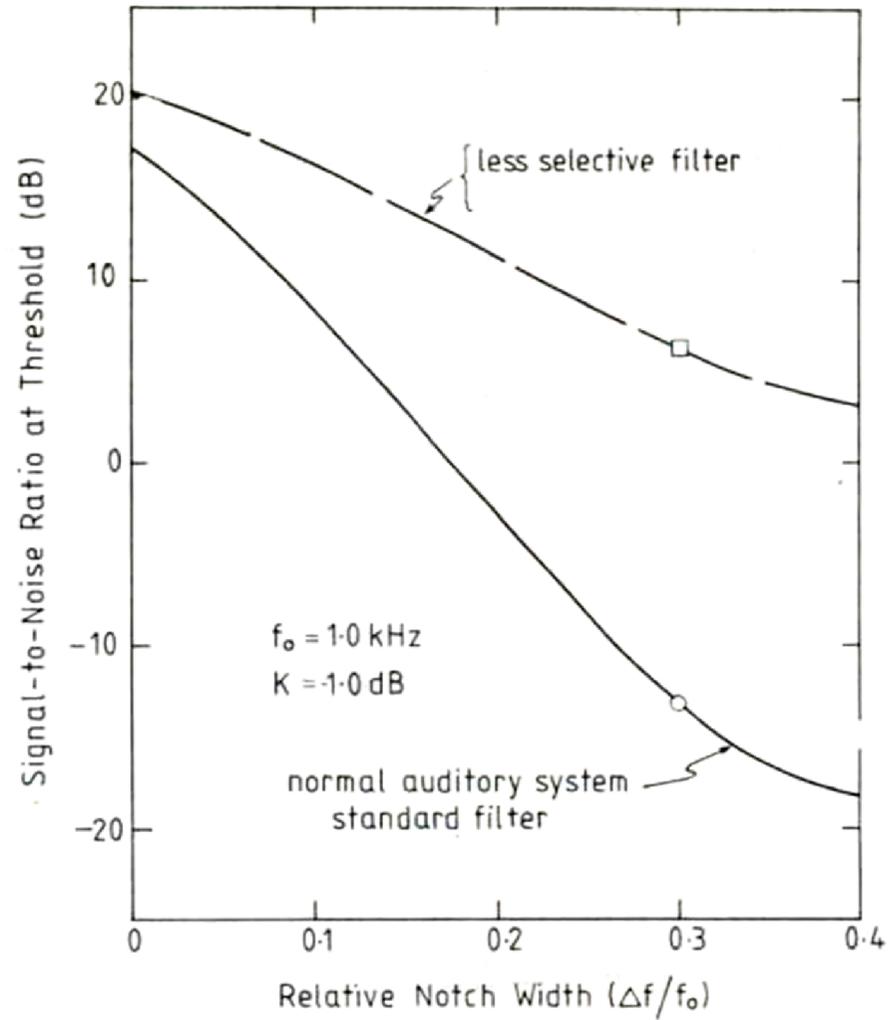


From Patterson et al. (1982)


# Typical results at one level, and a fitted auditory filter shape (symmetric & asymmetric notches)

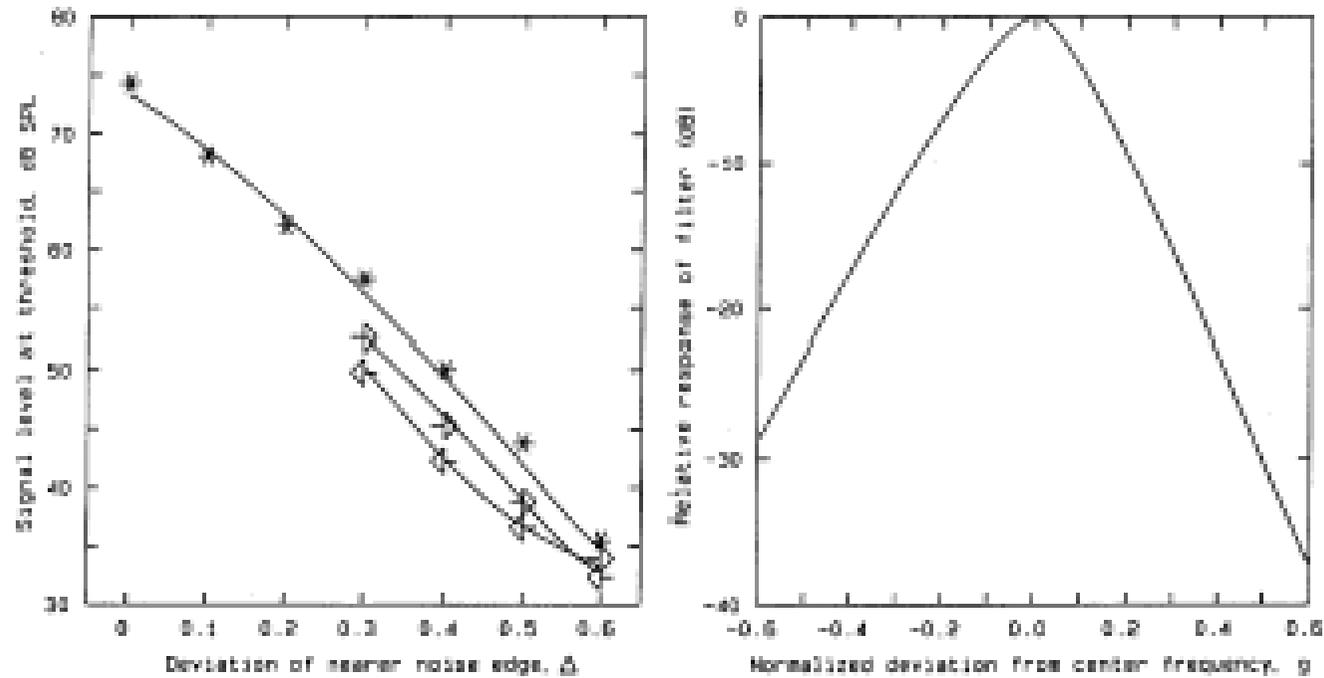


Now measure across level and assume filter linearity at frequencies substantially lower than CF

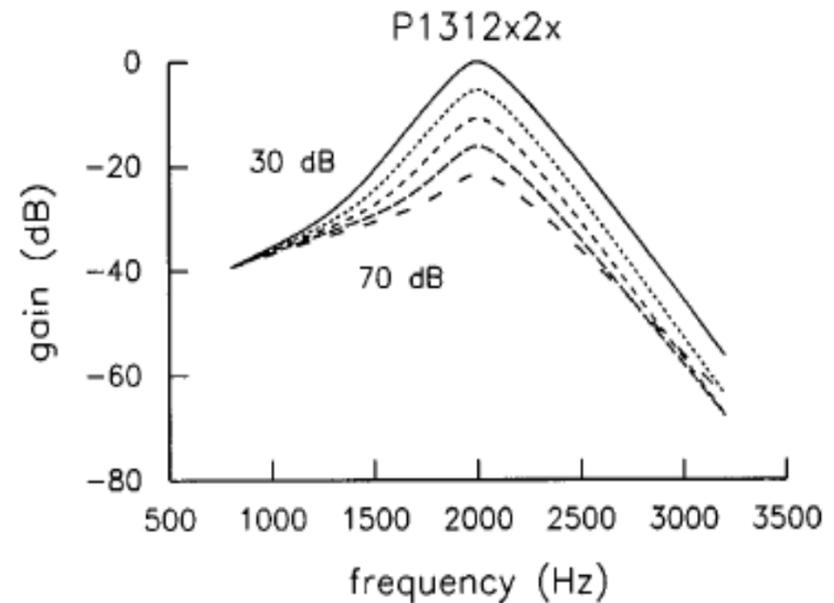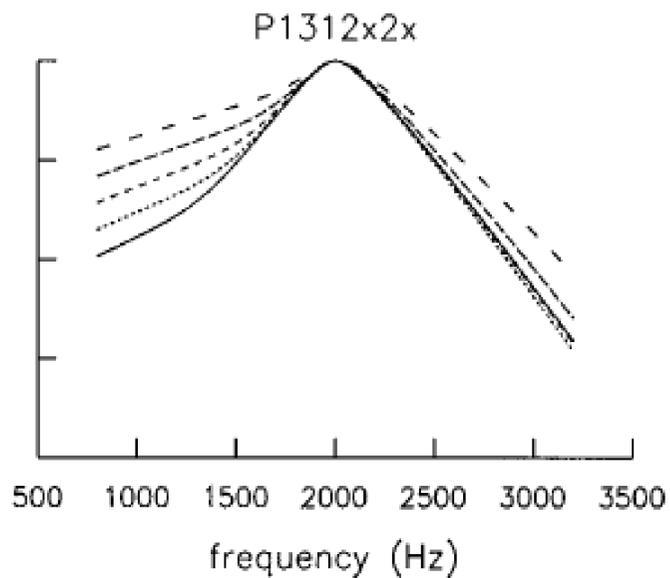


# Auditory filter shapes across level & frequency: Note the asymmetry

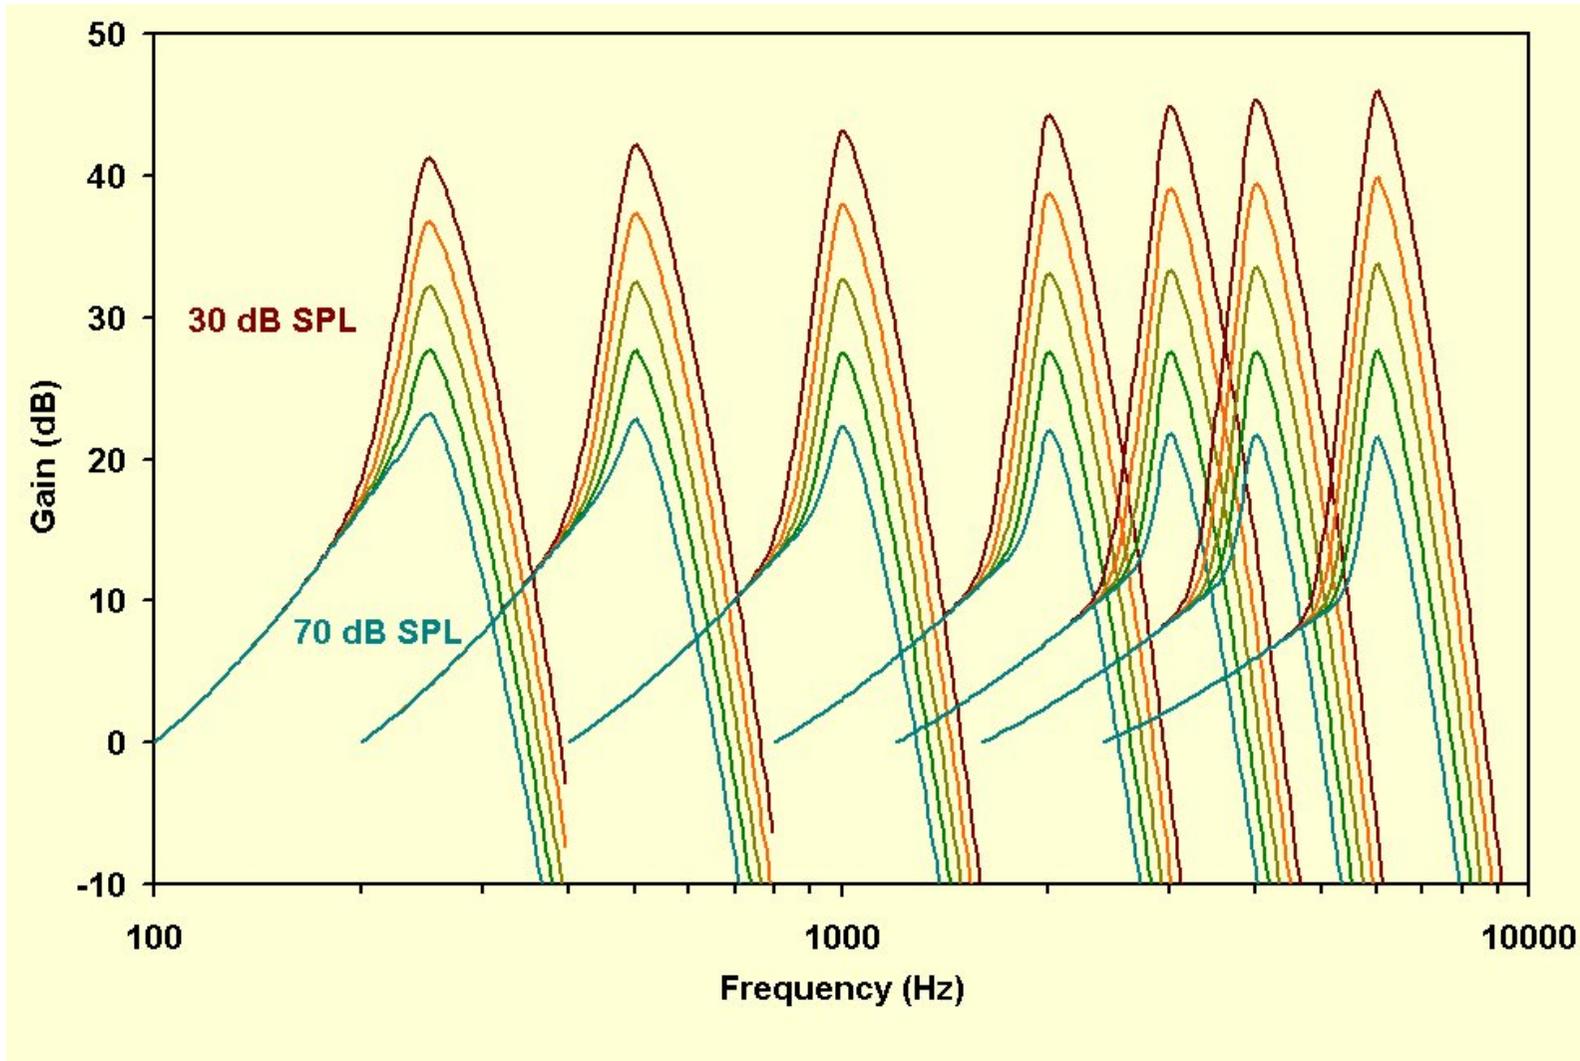

# Low masks high, but not v.v. Excitation patterns

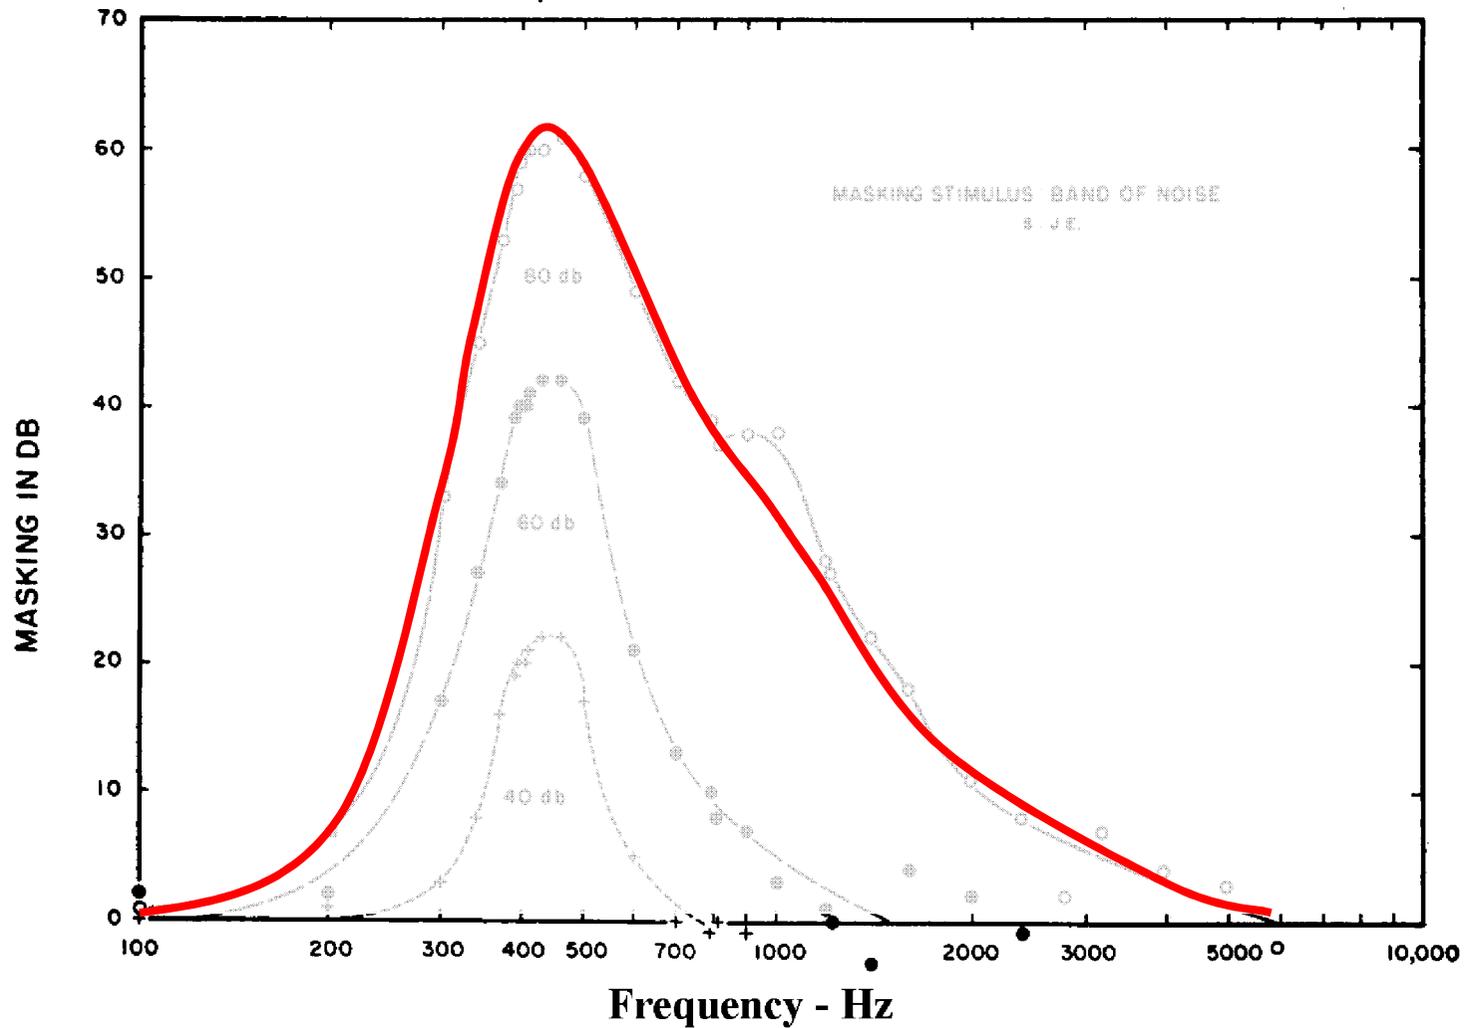

# Low masks high, but not v.v. Frequency responses

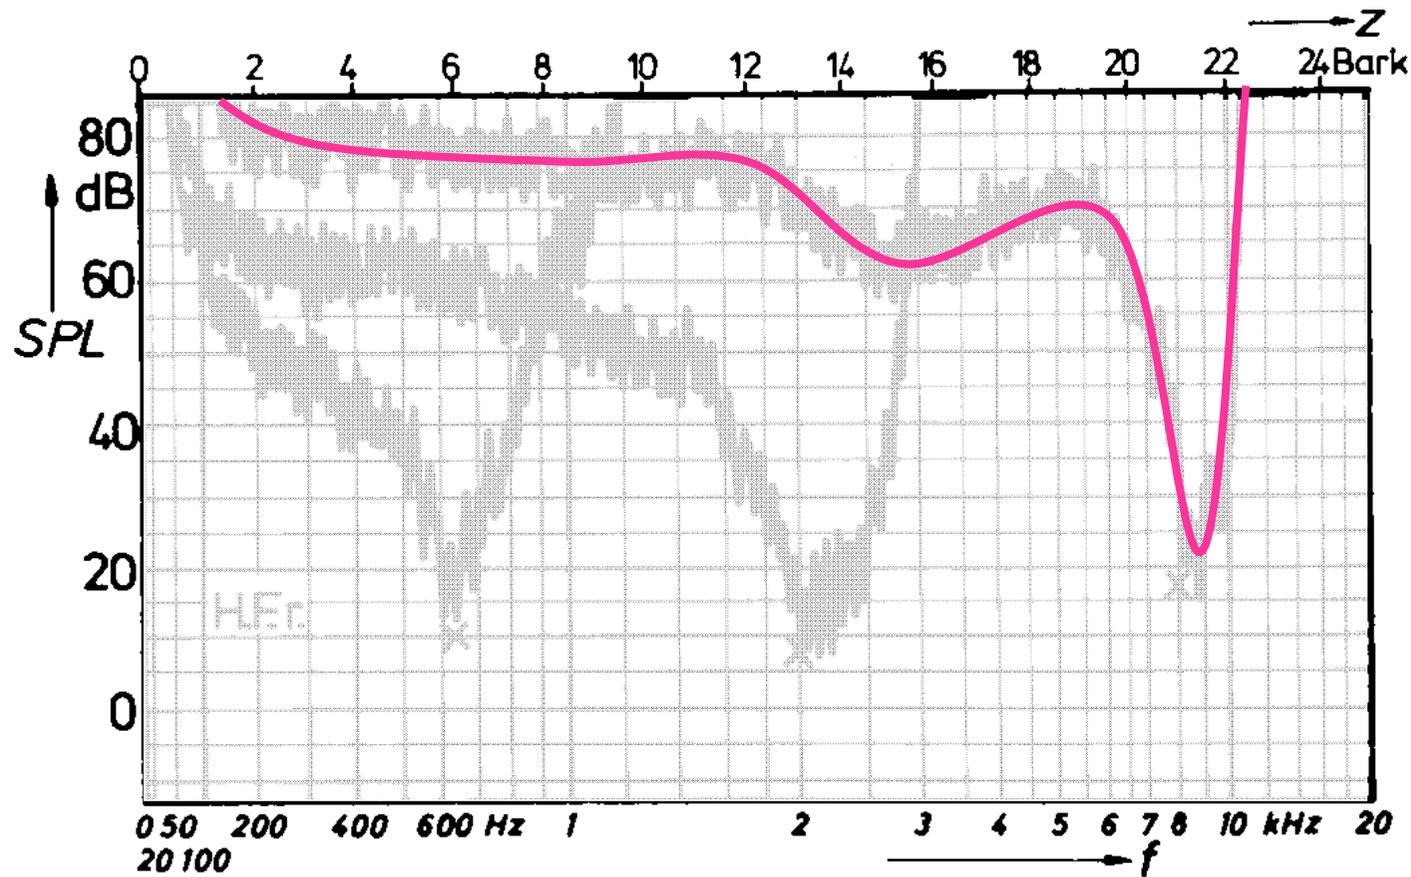

# Main points

- The “filters” through which we listen are the filters established in the inner ear, in SNHL as well as normal hearing.
  - supported by the similarity between physiological & behavioural measurements
- The width of the auditory filter is an important determinant in many aspects of auditory perception, e.g. ...
  - how well we can hear sounds in noise (which is almost always).
  - how different spectral components contribute to loudness
  - whether phase changes are audible in sounds

# Main points

- Spectral components that go into one auditory filter strongly interact ...
  - whereas those that go into different filters typically influence one another less
- Another terminology
  - Sounds that fall into one auditory filter are often said to fall into the same ***critical band***
- People will use whatever information is available to them, even when the task is as trivial as detecting a tone.